



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :

H04B 7/10, 7/08

A1

(11) International Publication Number:

WO 97/37441

(43) International Publication Date:

9 October 1997 (09.10.97)

(21) International Application Number: PCT/US97/05105

(22) International Filing Date: 27 March 1997 (27.03.97)

(30) Priority Data:

08/627,956

3 April 1996 (03.04.96)

US

(60) Parent Application or Grant

(63) Related by Continuation

US

Filed on

08/627,956 (CON)

3 April 1996 (03.04.96)

(71) Applicant (for all designated States except US): ERICSSON INC. [US/US]; 1 Triangle Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DENT, Paul, Wilkinson [GB/US]; 637 Eagle Point Road, Pittsboro, NC 27312 (US).

(74) Agents: BIGEL, Mitchell, S. et al.; Bell, Seltzer, Park &amp; Gibson, P.A., P.O. Drawer 34009, Charlotte, NC 28234 (US).

(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report.

With amended claims.

(54) Title: METHOD AND APPARATUS FOR POLARIZATION DIVERSITY IN A BASE STATION USING A PLURALITY OF RECEPTION ANTENNAS

## (57) Abstract

A base station (300) for communicating with at least one mobile station in a cellular communications system includes a plurality of receive antennas (322a-322e) wherein each receive antenna is oriented to define a respective receive coverage area. The antennas are supported by a support structure (318) so that a first receive antenna defines a first receive coverage area (352) and a second receive antenna defines a second receive coverage area (354) overlapping a portion of the first receive coverage area (358). First and second wideband receivers (332a, b) are operatively connected to respective first and second antennas (322a, b). The first wideband receiver receives a first plurality of receive channels from the first receive coverage area, and the second wideband receiver receives a second plurality of receive channels from the second receive coverage area. The first and second pluralities of receive channels include at least one common receive channel. The base station also includes first and second channel splitters (336a, b) operatively connected to the respective first and second wideband receivers for separating the first and second pluralities of receive channels. A diversity combiner (338b) is operatively connected to the first and second channel splitters for combining the common receive channel from the first and second channel splitters. Accordingly, an enhanced quality output receive channel is produced.

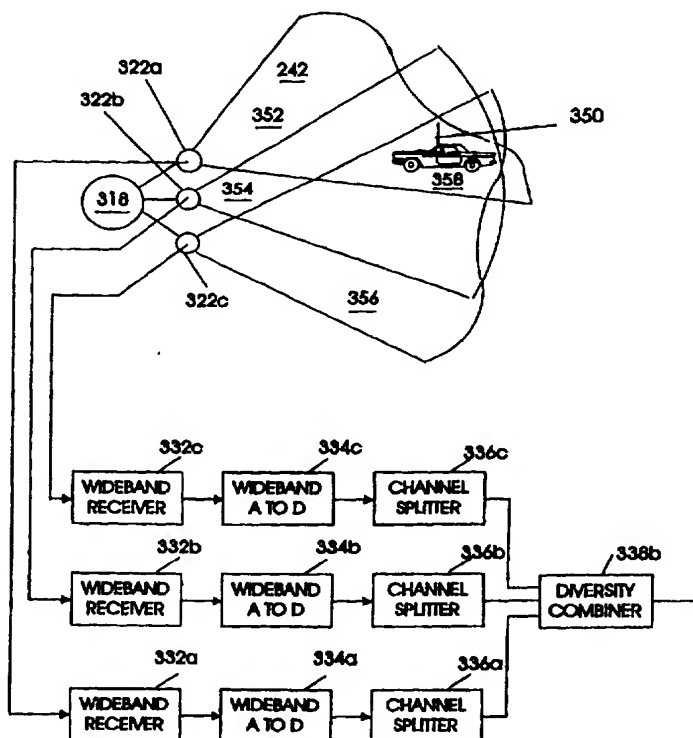

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**METHOD AND APPARATUS FOR POLARIZATION DIVERSITY IN A BASE STATION USING A PLURALITY OF RECEPTION ANTENNAS**

**Related Applications**

The present application is a continuation-in-part of U.S. Patent Application Serial No. 08/217,301 filed March 24, 1994, and U.S. Patent Application  
5 Serial No. 08/439,116 filed May 11, 1995, and the disclosures of both of these applications are hereby incorporated herein in their entirety by reference.

**Field of Invention**

The present invention is related to systems  
10 and methods for wireless communications, and more particularly to systems and methods for wireless cellular communications.

**Background of the Invention**

Cellular communications systems are commonly  
15 employed to provide voice and data communications to a plurality of mobile units or subscribers. Analog cellular systems, such as designated AMPS, ETACS, NMT-450, and NMT-900, have been deployed successfully throughout the world. More recently, digital cellular  
20 systems such as designated IS-54B in North America and the pan-European GSM system have been introduced. These systems, and others, are described, for example, in the book titled *Cellular Radio Systems* by Balston, et al., published by Artech House, Norwood, MA., 1993.

25 Frequency reuse is commonly employed in cellular technology wherein groups of frequencies are allocated for use in regions of limited geographic coverage known as cells. Cells containing equivalent groups of frequencies are geographically separated to

-2-

allow mobile units in different cells to simultaneously use the same frequency without interfering with each other. By so doing, many thousands of subscribers may be served by a system of only several hundred  
5 frequencies.

In the United States, for example, Federal authorities have allocated to cellular communications a block of the UHF frequency spectrum further subdivided into pairs of narrow frequency bands called channels.  
10 Channel pairing results from the frequency duplex arrangement wherein the transmit and receive frequencies in each pair are offset by 45 MHz. At present there are 832, 30-KHz wide, radio channels allocated to cellular mobile communications in the  
15 United States. To address the capacity limitations of this analog system a digital transmission standard has been provided, designated IS-54B, wherein these frequency channels are further subdivided into 3 time slots. In the 1900 MHz bands, the PCS1900 cellular  
20 standard provides 200 MHz channels each divided into eight time slots.

As illustrated in Figure 1, a cellular communication system 20 as in the prior art includes one or more mobile stations or units 21, one or more  
25 base stations 23 and a mobile telephone switching office (MTSO) 25. Although only three cells 36 are shown in Figure 1, a typical cellular network may comprise hundreds of base stations, thousands of mobile stations and more than one MTSO. Each cell will have  
30 allocated to it one or more dedicated control channels and one or more voice channels. A typical cell may have, for example, one control channel, and 21 voice/data, or traffic, channels. The control channel is a dedicated channel used for transmitting cell  
35 identification and paging information. The traffic channels carry the voice and data information.

-3-

The MTSO 25 is the central coordinating element of the overall cellular network 20. It typically includes a cellular processor 28, a cellular switch 29 and also provides the interface to the public switched telephone network (PSTN) 30. Through the cellular network 20, a duplex radio communication link 32 may be effected between two mobile stations 21 or, between a mobile station 21 and a landline telephone user 33. The function of the base station 23 is commonly to handle the radio communication with the mobile station 21. In this capacity, the base station 23 functions chiefly as a relay station for data and voice signals. The base station 23 also supervises the quality of the link 32 and monitors the received signal strength from the mobile station 21.

A typical base station 23 as in the prior art is schematically illustrated in Figure 2 which shows, as an example, the functional components of model number RBS 882 manufactured by Ericsson Telecom AB, Stockholm, Sweden for the CMS 8800 cellular mobile telephone system. A full description of this analog cellular network is provided in publication number EN/LZT 101 908 R2B, published by Ericsson Telecom AB.

A now common sight along many highways, the base station 23 includes a control unit 34 and an antenna tower 35. The control unit 34 comprises the base station electronics and is usually positioned within a ruggedized enclosure at, or near, the base of the tower. Within this enclosure are the radio control group 37, or RCG, an exchange radio interface (ERI) 38 and a primary power supply 41 for converting electric power from the AC grid to power the individual components within the base station 23, and a backup power supply 42.

The ERI 38 provides signals between the MTSO 25 and the base station 23. The ERI 38 receives data from the RCG 37 and transfers it to the MTSO 25 on a

- 4 -

dedicated MTSO-BS link 45. In the reverse direction, the ERI 38 receives data from the MTSO 25 and sends it the RCG 37 for subsequent transmission to a mobile station 21.

5           The radio control group 37 includes the electronic equipment necessary to effect radio communications. A functional block diagram of an RCG 37 as in the prior art is shown in Figure 3. The configuration shown illustrates one control channel  
10 transmit/receive module (TRM) 51, a number of voice channel TRMs 52, and one signal strength receiver 53, as is a typical configuration required to serve one cell or sector of a cell. Each TRM 51, 52 includes a respective transmitter 54, receiver 55 and control unit  
15 57. The TRMs 51, 52 are not typically frequency agile and operate instead on only one predetermined channel. Control signals from the ERI 38 are received by the individual control units 57. Voice and data traffic signals are routed over a separate interface to the ERI  
20 38.

Each individual transmitter 54 for control and voice is connected to a transmit combiner 58. The transmit combiner combines all of the input signals onto a single output coupled through a coaxial cable 62  
25 to the transmit antenna 63. Through the use of the combiner 58, up to 16 transmitters 54 can typically be connected to a common transmit antenna 63. The combiner 58 is used because there is often a premium for space on the masts and towers used to support the  
30 antennas. In an extreme case, one mast may be required to support over 100 radio channels.

On the receive side, each of two receive antennas 65 is coupled to a respective receive combiner 66A, 66B where the signals received are separated  
35 according to frequency and passed on to the individual receivers 55 in each of the TRMs 51, 52. The two receive antennas 65 are typically spaced 3 to 5 meters

-5-

apart on the tower so that they may receive signals with uncorrelated fading patterns to thereby provide space diversity reception. There are many conventional techniques for both pre-detection and post-detection  
5 diversity which are described, for example, in Chapter 10 of the book entitled "*Mobile Communications Engineering*", by William C.Y. Lee, published by McGraw-Hill, 1992.

One visible feature of a typical base station  
10 23 is the antenna tower 35. In order to achieve a reasonable coverage area, the antennas 63, 65 are desirably mounted at some distance above the ground. Referring now additionally to the prior art schematic plan view illustration of Figure 4A, in rural areas the  
15 towers 35 are commonly located at the center of a cell 36 thereby providing omni-directional coverage. In an omni-directional cell, the control channel(s) and the active voice channel(s) are broadcast in all areas of the cell -- usually from a single antenna. Where base  
20 stations 23 are more densely located, a sectorized antenna system may be employed as in the prior art, and shown by the schematic diagram of Figure 4B. Sectorization requires directional antennas 70 having, for example, a 120 degree radiation pattern as  
25 illustrated in Figure 4B. Each sector 71 is itself a cell having its own control channel(s) and traffic channel(s). Note that "channel" may refer to a specific carrier frequency in an analog system or to a specific carrier/slot combination in a hybrid TDMA/FDMA  
30 system, such as IS-54 and GSM.

Figure 5A illustrates a typical antenna system as in the prior art and as discussed above. Figure 5B illustrates two types of prior art antennas that have been heretofore discussed -- an  
35 omni-directional antenna, such as a dipole 66, and a directional sector antenna 70 which further includes a reflector 64, for example. It being understood that

-6-

transmit and receive antennas are typically of the same type for a given base station.

The use of scanning phased array antennas in cellular communications systems has been proposed. For example, Stapleton, et al., *A Cellular Base Phased Array Antenna System*, Proceedings of the 93rd IEEE VTC, pp. 93-96 describe a circular array of monopole radiating elements to provide 360 degree scanning capability. Stapleton's antenna is designed such that each radiating element has the potential of transmitting on every channel allocated to the cell.

It should be noted that passive microstrip arrays are also currently available for use with cellular base stations. For example, type no. 1309.41.0009 manufactured by Huber+Suhner AG of Herisau, Switzerland is a seven element linearly polarized flat panel passive antenna with a shaped elevation beam for use in cellular base stations. This array can replace the typical dipole antenna and is more suitable for locations on the sides of buildings or other flat surfaces. In application note 20.3, published by Huber+Shuner, it is shown that wide area coverage may be obtained via the use of power-splitters whereby portions of the signals are diverted to several individual panels.

The performance of diversity reception increases as the number of diversity antennas is increased. However, there may not be space on the antenna tower to provide a plurality of diversity antennas for each 120° or 60° sector. Moreover, the need for a corresponding plurality of diversity receiving channels for each radio channel may increase costs. In addition, the orientation of the linearly polarized mobile antenna may not always be in alignment with the typically vertically polarized receive antenna at the base station. Furthermore, reception at the mobile station may also be subject to fading.

### Summary of the Invention

In view of the foregoing background, it is therefore an object of the present invention to provide an economic cellular communications system base station  
5 capable of providing enhanced communication with a mobile station, particularly in view of fading and/or misorientation of the antenna.

This and other objects, advantages and features of the present invention are provided by a  
10 base station comprising a plurality of antennas including a first receive antenna defining a first receive coverage area and a second receive antenna defining a second receive coverage area overlapping a portion of the first receive coverage area. Respective  
15 wideband receivers are connected to each of the first and second antennas, and each wideband receiver receives a plurality of receive channels from the respective receive coverage area. Furthermore, at least one channel from each plurality of receive  
20 channels received by the wideband receivers is a common receive channel.

Accordingly, a mobile station transmitting from the overlap coverage area on the common receive channel is received by both the first and second  
25 wideband receivers thereby providing for diversity combination. In addition, the wideband receivers provide that a plurality of channels operating on a plurality of frequencies are received by each antenna without requiring a plurality of receivers.

30 The base station also includes first and second channel splitters operatively connected to the respective wideband receivers for separating the first and second pluralities of receive channels. In particular, the common receive channel is separated  
35 from each plurality of receive channels. A diversity combiner is operatively connected to each of the channel splitters and combines the common receive

- 8 -

channel from the first and second channel splitters in order to produce an enhanced quality output receive channel.

The first antenna may receive signals having a first polarization and the second antenna may receive signals having a second polarization allowing the diversity combiner to combine the common receive channel by polarization diversity combination. Furthermore, the first polarization may be right-hand-circular polarization and the second polarization may be left-hand-circular polarization. Accordingly, each antenna may be implemented as an array of patch antenna elements on an elongate substrate.

Furthermore, the different polarizations allow each antenna to both receive and transmit by using polarization isolation. For example the first antenna may define a first transmit coverage area and transmit signals having the second polarization, and the second antenna may define a second transmit coverage area and transmit signals having the first polarization. In addition, the first and second antennas may be adjacent antennas. Accordingly, the base station can include a plurality of circularly arranged antennas wherein every other antenna receives signals having the same polarization and adjacent antennas have overlapping receive coverage areas. This arrangement allows the base station to receive signals from any direction while providing diversity combination.

Each of the receive channels may operate on a predetermined frequency, and the first and second pluralities of receive channels may each comprise receive channels operating on consecutive predetermined frequencies. Accordingly, the bandwidth of the first and second wideband receivers may be reduced thereby reducing the cost of the base station.

- 9 -

Higher order diversity combination can be accommodated by providing more antennas on the base station which define receive coverage areas overlapping the overlap receive coverage area. For example, a  
5 third receive antenna may define a third receive coverage area overlapping portions of the first and second receive coverage areas. In addition, a third wideband receiver operatively connected to the third antenna may be adapted to receive a third plurality of  
10 receive channels from the third receive coverage area and the third plurality of receive channels may include the at least one common receive channel. A third channel splitter may separate the third plurality of receive channels and the diversity combiner may combine  
15 the common receive channel from the first, second, and third channel splitters.

The base station of the present invention provides diversity combination of a receive channel which is received by two or more antennas on the base  
20 station. Accordingly, an enhanced quality output channel is produced. In addition, by using a wideband receiver with each antenna, a plurality of receive channels operating on a plurality of frequencies can be received at each antenna without requiring a separate  
25 receiver for each frequency for each antenna.

In addition, the bandwidth of each wideband receiver can be reduced by providing that individual wideband receivers receive consecutive frequencies. By reducing the bandwidth required for the majority of the  
30 wideband receivers, the overall cost of the system can be reduced.

### **Brief Description of the Drawings**

Figure 1 is a schematic block diagram illustrating the basic components of a cellular  
35 communications system as in the prior art.

-10-

Figure 2 is a schematic block diagram illustrating the functional components of a cellular communications base station as in the prior art.

Figure 3 is a schematic block diagram  
5 illustrating the functional elements of Radio Control Group of a base station as in the prior art.

Figure 4A is a schematic plan view illustrating an omni-directional cellular pattern as in the prior art.

10 Figure 4B is a schematic plan view illustrating a sectorized cellular pattern as in the prior art.

Figure 5A is a schematic side view illustrating a typical cellular antenna system as in  
15 the prior art.

Figure 5B is a schematic side view illustrating an omni-directional antenna and a sector antenna as in the prior art.

Figure 6 is a plan view of a base station  
20 including a plurality of antennas according to the present invention.

Figure 7 is a top view of the base station of Figure 6.

Figure 8 is a cut away view of an antenna  
25 including a plurality of patch antenna elements on an elongate substrate according to Figure 6.

Figure 9 is a schematic view of an antenna according to Figure 8.

Figure 10 is a front perspective view of a  
30 single patch antenna element on an elongate substrate according to Figure 8.

Figure 11 is a rear perspective view of a single patch antenna element on an elongate substrate according to Figure 8.

35 Figures 12A-C are block diagrams of the antennas of Figure 6 together with the associated processing blocks.

-11-

Figure 13 is a top view of a portion of the base station of Figure 6 illustrating three adjacent antennas and the respective overlapping receive coverage areas.

5

#### Detailed Description

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to one having skill in the art. Like numbers refer to like elements throughout.

Referring first to Figures 6 and 7, a base station 300 including a plurality of antennas 322a-1 is described. The antennas are arranged in a cylindrical pattern to receive signals from any direction. In addition, alternating antennas may be arranged to receive signals having alternating polarizations. For example, antennas 322a, 322c, 322e, 322g, 322i, and 322k can receive signals having a first rotational polarization, while antennas 322b, 322d, 322f, 322h, 322j, and 322l receive signals having a second rotational polarization. More particularly, antennas 322a, 322c, 322e, 322g, 322i, and 322k can receive signals having right-hand-circular polarization, and antennas 322b, 322d, 322f, 322h, 322j, and 322l can receive signals having left-hand-circular polarization. In addition, each of these antennas can transmit using a polarization opposite that used to receive. Alternately, each antenna can receive both polarizations.

-12-

Each of the antennas 322a-1 preferably includes a plurality of receive antenna elements for receiving signals having a predetermined rotational polarization as discussed above. These antenna  
5 elements are arranged in a predetermined pattern to define respective receive coverage areas for each of these antennas. The antenna elements may be circular patch antenna elements (as illustrated in Figures 8 and 9) or crossed dipoles as would be readily understood by  
10 one having skill in the art. In addition, these antenna elements may serve simultaneously as transmit antenna elements. Antenna mounting means, such as the illustrated antenna mast 318, is preferably provided for mounting the antennas so that the adjacent receive  
15 coverage areas defined by adjacent antennas are overlapping.

A cut away of a single antenna 322 is illustrated in Figure 8. In a preferred embodiment, the antenna includes a plurality of printed circuit  
20 board antenna elements 224, such as patch antenna elements. The patch antenna elements 224 are provided on an elongate substrate 226 such as a printed circuit board, and these patch antenna elements can be used as transmit and receive elements simultaneously. The  
25 elongate substrate may also be provided with other components such as transmit power amplifiers 228, input 230b or transmit 230a filters, a common receive low noise amplifier ("LNA") 231, and an output filter 232b or receive filter 232a, as illustrated schematically in  
30 Figure 9. As further illustrated in Figure 8, the elongate substrate 226, with patch antennas 224 is preferably enclosed in a radio-transparent, weatherproof tubular housing 234. A mounting bracket 236 can be used to connect the antenna to the base  
35 station mast, and the cable 220 can be used to connect the antenna 322 to the wideband receivers (illustrated in Figure 12). In addition, a temperature sensor and

-13-

heater can be included within the housing for colder climates.

As shown schematically in Figure 9, each antenna element 224 is coupled by first coupling circuit 238 including first coupling line 239 to a common receive filter 232a and low-noise receive amplifier 231. A second coupling circuit 240 including coupling line 241 distributes a transmit signal to the transmit power amplifiers 228. As would be readily understood by one having skill in the art, the transmit amplifiers may be either single carrier power amplifiers (SCPA's) for amplifying a Time Division Multiple Access (TDMA) signal, or multi-carrier power amplifier's (MCPA's) for amplifying a composite of several different carrier frequency signals. In the case that SCPA's are used, a signal is directed towards a single principle direction on a single frequency, while if MCPA's are used, multiple signals on different frequencies can be directed in each direction. In the receive direction, however, the receive low noise amplifier 231 is preferably always capable of receiving and amplifying signals on multiple frequencies. In addition to coupling line 240, the second coupling circuit may include switching means for dynamically partitioning the transmit array to provide transmit sub-arrays operating on different frequencies in the same time slot.

The transmit amplifiers 228 may produce wideband noise outputs at frequencies overlapping the receive frequency band and be of sufficient level to degrade the noise figure of the receive low noise amplifier 231. Accordingly, a transmit filter 230a and receive filter 232a can be used as illustrated. The receive filter 232a may be a band-pass filter tuned to pass the receive frequency band and attenuate transmit frequency signals, while the transmit filter 230a or input filter 230b can be notch filters to attenuate

-14-

transmission in the receive frequency band and pass the transmit frequency band.

As would be readily understood by one having skill in the art, directivity favoring reception is one way to improve received signal quality. Another way to improve the received signal quality is diversity reception using two or more preferably independent channels, for example, on widely spaced antennas (space diversity), different frequencies (frequency diversity) or different polarizations. The use of different polarizations gives independent fading even when the antennas cannot be widely spaced. Considerable diversity gain is available when combining signals from sources suffering from uncorrelated fading in a joint signal processor, as distinct from just combining signals from different antenna array elements to obtain directive gain.

Typically combining signals from two different antennas experiencing the same signal fading will yield a gain of approximately 3dB while if the fading is uncorrelated Rayleigh, gains on the order of 7dB may be obtained. Fading can be uncorrelated on two antennas spaced only inches apart on a mobile phone, but unfortunately, due to a geometric magnification effect, the spacing required at a base station can be hundreds of times greater. Relatively close spacing is possible at the mobile station because the multiple paths that cause fading tend to arise due to near field clutter in the vicinity of the mobile station, such as due to reflections from objects within a few tens or hundreds of yards. In the reverse direction, however, these reflections may propagate several miles to the base station causing the geometric magnification of the antenna spacing required at the base station. Accordingly, a spacing of several feet between adjacent antennas at the base station may be insufficient to obtain uncorrelated fading through space diversity.

-15-

On the other hand, it is observed that fading is largely uncorrelated when comparing antennas of orthogonal polarizations. Accordingly, the alternate antennas are preferably orthogonally polarized. For example, each of antennas 322a, 322c, 322e, 322g, 322i, and 322k, may use orthogonal rotational polarizations such as right-hand-circular-polarization (RHCP) for receiving and left-hand-circular-polarization (LHCP) for transmitting, while each of antennas 322b, 322d, 322f, 322h, 322j, and 322l may use the opposite polarizations for receiving and transmitting. Accordingly, polarization isolation can be used in a preferred embodiment to help isolate the transmit and receive signals. The receive paths preferably have multi-carrier capability even if the transmitting paths have only single-carrier capability. Therefore, the received signals are received with both RHCP and LHCP which exhibit uncorrelated fading. Upon processing the signals from two or more antennas, a diversity gain is obtained which is greater than the directive gain that would have been obtained had all antennas had like receive polarization.

As will be understood by one having skill in the art with reference to Figure 8, each antenna is preferably fabricated separately on an elongate substrate 226 such as a long thin module or printed circuit board. Printed circuit board antenna elements, such as patch antennas, may be readily fabricated as part of such a module as would be readily understood by one having skill in the art. As shown in Figures 10 and 11, a circular patch antenna element 224 may be fed at two feed points 270 and 272, and the two feed points connected to a printed, branch-line quadrature coupler 274 to provide two feed points 270 and 272 of opposite circular or rotational polarization. A ground connection 276 can be used to connect the antenna element 224 to a ground plane 278 shown sandwiched

-16-

between two layers of the elongate substrate 226. As will be understood by one having skill in the art, active elements, such as amplifiers, and passive elements, such as filters, may also be mounted or  
5 constructed on the elongate substrate.

Multiple antennas may be mounted on a single antenna mount. Each antenna thereby provides directivity in the azimuthal plane as well as a narrow beam in the vertical plane, and the antennas may be  
10 oriented to cover different azimuthal sectors. This can be done by mounting different collinear antennas around the antenna mast at the same height but pointing to different azimuthal sectors, or by mounting two or more antennas above each other pointing to the same or  
15 different azimuthal sectors. In fact, the azimuthal pointing of an antenna may be set independently of where it is mounted, but it is preferred that the antennas be directed so that there is no interference from the other antennas or the mast.

20 The base station 300 preferably includes a plurality of antennas 322a-1 arranged in a circular pattern, as shown in Figures 6 and 7. Signals received from each antenna are applied to respective wideband receivers 332a-1 as shown in Figures 12A-C. Signal  
25 loss between the antennas and wideband receivers can be reduced by integrating masthead preamplifiers into the antenna assembly of Figure 8. The masthead preamplifiers provide gains ahead of cables used to connect the antennas and wideband receivers.  
30 Optionally, masthead down conversion to an intermediate frequency can be used.

As will be understood by one having skill in the art, a wideband receiver is a receiver which receives signals having frequencies over a  
35 predetermined range of frequencies so that a plurality of cellular frequencies is received. As discussed in U.S. Patent Application Serial No. 08/601,768, entitled

-17-

"Multichannel Receiver Using Analysis By Synthesis" to Paul W. Dent, and filed February 15, 1996, a wideband receiver can separate individual frequency channels spaced, for example, by 30 KHz (AMPS) or 200 KHz  
 5 (PCS1900). This application is hereby incorporated herein in its entirety by reference.

The use of wideband receivers allows a plurality of frequencies to be received at each antenna without requiring a plurality of single frequency  
 10 receivers to be connected to each antenna. In the embodiment shown in Figure 8, the base station is adapted to receive twelve frequencies, and each wideband receiver is adapted to receive three of these frequencies. In particular, each frequency is received  
 15 by three adjacent antennas and associated wideband receivers.

As an example, the wideband receivers can be adapted so that each antenna 322a-1 receives three frequencies  $f$  as shown in Table 1.

20 Table 1

	<u>Antenna</u>	<u>Frequencies</u>
	322a	$f_{12}, f_1, f_2$
	322b	$f_1, f_2, f_3$
	322c	$f_2, f_3, f_4$
25	322d	$f_3, f_4, f_5$
	322e	$f_4, f_5, f_6$
	322f	$f_5, f_6, f_7$
	322g	$f_6, f_7, f_8$
	322h	$f_7, f_8, f_9$
30	322i	$f_8, f_9, f_{10}$
	322j	$f_9, f_{10}, f_{11}$
	322k	$f_{10}, f_{11}, f_{12}$
	322l	$f_{11}, f_{12}, f_1$

Each frequency for the base station is received by  
 35 three adjacent antennas and respective wideband receivers, and as previously discussed, alternating antennas receive the frequency with alternating polarizations. Accordingly, polarization diversity reception can be achieved.

-18-

Each receive channel operates on a predetermined frequency which is allocated to the base station. As shown in Table 1, a base station with 12 antennas can be allocated 12 frequencies  $f_{1-12}$ , and each wideband receiver can be adapted to receive a unique combination of three of these frequencies. Furthermore, each frequency is preferably received by three adjacent antennas defining an overlap receive coverage area common to all three antennas.

By allocating the frequencies as shown in Table 1, and providing that:

$$f_1 < f_2 < f_3 < f_4 < f_5 < f_6 < f_7 < f_8 < f_9 < f_{10} < f_{11} < f_{12}$$

or alternately that:

$$f_1 > f_2 > f_3 > f_4 > f_5 > f_6 > f_7 > f_8 > f_9 > f_{10} > f_{11} > f_{12}$$

the bandwidth of the wideband receivers can be reduced. In particular, wideband receivers **332b-k** can be adapted to receive consecutive frequencies. Only wideband receivers **332a** and **332l** receive non-consecutive frequencies in this arrangement. By reducing the bandwidth required for the majority of the wideband receivers, the overall cost of the system can be reduced. Furthermore, the circle of overlapping receivers can be extended to greater than one full turn of 360° by adding receivers for frequencies  $f_{13}$ - $f_{24}$  using the same antennas. Only the first and last receivers in this sequence do not receive consecutive channels.

As will be understood by one having skill in the art, each frequency can support one or more cellular communication receive channels. For example, in a cellular system supporting a Time Division Multiple Access ("TDMA") standard such as GSM, each frequency can be divided into eight receive channels. Accordingly, each channel is received by three antennas in the example of Table 1. Furthermore, higher orders of diversity can be achieved by providing antennas and

-19-

wideband receivers capable of receiving more frequencies, thus obtaining overlap of frequency for more than three antennas. For example, each frequency (and therefor each receive channel) can be received by  
5 five adjacent antennas using 5-channel wideband receivers.

As shown in Figures 12A-C, a wideband receiver 332a is operatively connected to each respective antenna 322a. The wideband receiver for  
10 each antenna is adapted to receive a predetermined plurality of receive channels from a receive coverage area (shown in Figure 13) for that antenna. For example, each wideband receiver can receive three frequencies with as many as eight time slots per  
15 frequency, when TDMA is used. Wideband A-to-D converters 334a-1 can be used to convert the signal generated by the respective wideband receiver 332a-1 into a digital signal. These digital signals can then be separated into separate receive channels by  
20 respective digital channel splitters 336a according to frequency and time slot. Respective diversity combiners 338a-1 combine common receive channels from adjacent antennas to produce an enhanced quality output receive channel.

25 In the embodiment of Figures 12A-C, three frequencies are received by each antenna, and each frequency supports one receive channel using FDMA or multiple channels using TDMA having multiple time slots. It will be understood by one having skill in  
30 the art that the diversity combiners can operate sequentially for each time slot in order to adapt to different mobile signals in each time slot arriving from slightly different directions within the same sector. Furthermore, a single frequency can be  
35 received by more than three antennas by providing the appropriate wideband receivers, and making the

-20-

additional connections between the channel splitters and the diversity combiners.

In Figure 13, three adjacent antennas **322a-c** from the base station **300** of Figures 7 and 8 are  
5 illustrated together with the associated wideband receivers **332a-c**, wideband analog-to-digital converters **334a-c**, channel splitters **336a-c**, and diversity combiner used to process a receive channel from a mobile station **350**, such as an automobile cellular  
10 radiotelephone. As shown, a support structure such as an antenna mast **318** is used to support the antennas so that each antenna defines a respective receive coverage area, and a portion of all three receive coverage areas overlap. The first antenna **322a** defines the first  
15 receive coverage area **352**, the second antenna **322b** defines the second receive coverage area **254**, and the third antenna **322c** defines the third receive coverage area **356**. Portions of all three receive coverage areas overlap in the overlap coverage area **358**.

20 In addition, the wideband receivers **332a-c** are each adapted to receive a common receive frequency, and this common receive frequency can accommodate one or more common receive channels using TDMA time slots or CDMA codes. For purposes of description, a single  
25 common receive channel will be described, but one having skill in the art will understand that multiple channels can be accommodated according to the present invention using TDMA or CDMA on a single frequency channel. Accordingly, the mobile station **350** in the  
30 overlap coverage area **358** can transmit over the common receive channel on the common frequency to all three antennas **322a** simultaneously.

The channel is received at each of the wideband receivers **332a-c** and converted to digital  
35 signals by each of the wideband analog-to-digital converters **334a-c**. In addition, other channels on other frequencies can be received by each of the

-21-

antennas and wideband receivers. Accordingly, the digital splitters separate the common receive channel. Because each of the three antennas receive the common receive channel from a different path, the diversity  
5 combiner **338b** is used to combine the common receive channel as received by each of the antennas in order to produce an enhanced quality receive channel. As will be understood by one having skill in the art, the wideband analog-to-digital converters, channel  
10 splitters, and diversity combiners can be implemented separately or in combination using special purpose computers, general purpose computers with special purpose software, special purpose hardware, or combinations thereof.

15 In particular, the first antenna **332a** and third antenna **332c** can receive signals having a first polarization, and the second antenna **332b** can receive signals having a second polarization different from the first polarization. Accordingly, the signals can be  
20 combined using a polarization diversity combiner. More particularly, the first polarization can be right-hand-circular polarization, and the second polarization can be left-hand-circular polarization.

By using antennas comprising arrays of patch  
25 antenna elements **224** as illustrated in Figures 8, 9, 10, and 11, the antennas can transmit as well as receive. By transmitting on a polarization opposite that used to receive, polarization isolation can be used to accommodate both transmission and reception.  
30 For example, the first antenna **322a** and third antenna **322c** define first and third transmit coverage areas which can be the same as the respective receive coverage areas, and the second antenna **322b** defines a second transmit coverage area that can be the same as  
35 the second receive coverage area. The first and third antennas receive signals having a first polarization such as right-hand-circular polarization, and transmit

-22-

signals having a second polarization such as left-hand-circular polarization. The second antenna receives signals having the second polarization and transmits signals having the first polarization. When a mobile receiver lies in the overlap region between two antenna patterns, alternate TDMA bursts destined for that mobile receiver may be transmitted from first alternating with a second antenna of opposite polarization, thus obtaining polarization diversity transmission.

While the common receive channel is shown as being received by three antennas on the base station, one having skill in the art will understand that the channel can be received by more antennas simultaneously. For example, in a base station with 12 antennas evenly spaced in a circular pattern around a mast with each antenna defining a 120° azimuthal receive coverage area, up to seven antennas can receive a channel being transmitted by a single mobile station. In this case, each wideband receiver can receive seven frequencies and each diversity combiner can be connected to seven channel splitters to combine channels from the seven antennas.

The diversity combiners 338a-1 preferably include signal quality determining means for determining signal-to-noise ratios of the respective receive channels, and weighting means for weighting the receive channels based upon the respective signal-to-noise ratios thereof to thereby generate the enhanced quality output receive signal. The determination of signal-to-noise ratios and weighted processing of diverse receive signals is disclosed in U.S. Patent No. 5,191,598 to Bäckström et al., the entire disclosure of which is incorporated herein by reference. In addition, patent application serial No. 08/251,202 entitled "Diversity Receiver for Signals With Multipath Time Dispersion" to Bottomley and filed May 21, 1994

-23-

discloses an alternate diversity receiver technique. This application is hereby incorporated herein by reference.

Alternately, both polarizations can be  
5 received on each antenna, either by constructing receive only antennas or by using duplexing filters in place of transmit filters 230a, as shown in Figure 9. In this case, a first receive signal having a polarization orthogonal with respect to the transmit  
10 signal is fed to the amplifier 231, as before. In addition, a second received signal is separated from the transmit path, wherein the second received signal has the same polarization as the transmitted signal. A separate amplifier, similar to amplifier 231 can be  
15 added for this extra receive path, and both polarizations of received signals from one or more antennas can be fed to respective wideband receivers.

Each active antenna 322 can include a plurality of RF power transmit amplifiers 228 each  
20 coupled through a transmit filter 230a to an individual radiating transmit antenna element 224, as shown in Figure 9. The antenna elements 224 can be used to both transmit and receive simultaneously. Power can be distributed to each power amplifier 228 via a power  
25 dividing network such as coupling circuit 240. In this embodiment, the above-mentioned components are preferably fabricated using stripline or microstrip techniques on a mounting substrate, such as a glass-epoxy printed circuit board, as would be readily  
30 understood by one having skill in the art. Dividing means, such as coupling circuit 240, can include a plurality of inputs and switching means to select which input signals are distributed to which amplifiers 228. The switching means can be activated by pre-programmed  
35 control means to determine for each time slot if the full array is used at one transmit frequency or if

-24-

transmit sub-arrays are formed for transmitting multiple frequencies simultaneously.

The receive antenna elements 214 are coupled to a common output via a combining network such as coupling circuit 238. Basically the inverse of the power dividing network, the combining network coherently couples the signals received from array elements 214 into a common output. The combining network may introduce phase offsets or tapered coupling in order to effect beam shaping or to reduce vertical sidelobes, and to reduce unwanted deep nulls to mobiles very close to the mast.

The output of the combining network is illustratively coupled to a receive filter 232a and a low-noise amplifier (LNA) 231. Traditionally, a similar LNA was located in the RCG of a conventional base station, and, accordingly, the received signal suffered 2-4 dB of transmission loss through the IFL cabling. By locating the LNA 231 on the receive antenna 322 in accordance with another advantage of the present invention, losses prior to amplification are reduced thereby benefitting the overall system noise figure and allowing an increase in site/cell radius or a reduction in mobile power output to increase battery life.

The amplified receive signal from the LNA 231 is also preferably filtered to remove unwanted signal components, such as those generated by the power transmit amplifiers 228 that are not always removed by receive filter 232a. Therefore the output of LNA 231 is preferably coupled to a band-pass filter such as output filter 232b. The band-pass filter may be a microstrip edge coupled filter, such as described in Chapter 6 of Bahl, et al., *Microwave Solid State Circuit Design*, Wiley & Sons, 1988, a high-k ceramic resonator filter, or a SAW filter. Depending on the system bandwidth and transmit/receive duplex spacing, a

-25-

low-pass, or high-pass filter may also be acceptable as would be readily understood by one having skill in the art.

Both the transmit signals and the receive  
5 signals are coupled to/from the antennas **322a-1** via a cable such as an interfacility link (IFL). The IFL preferably comprises a bundle of coaxial cables, and power cables to provide power to the power transmit amplifiers **228** and the LNA **231**.

10 The invention also includes a method for operating a cellular base station which communicates with at least one mobile station as shown in Figure 13. A first receive coverage area **352** is defined by the first antenna **322a**, and a second receive coverage area  
15 **354** is defined by the second antenna **322b**. These receive coverage areas overlap as shown in the overlap receive coverage area **358**. A first plurality of receive channels are received from the first receive coverage area **352** by a first wideband receiver **332a**,  
20 and a second plurality of receive channels are received from the second receive coverage area **354** by a second wideband receiver **332b**.

The first and second pluralities of receive channels include at least one common receive channel.  
25 The common receive channel is separated from each of the first and second pluralities of receive channels by channel splitters **336a** and **336b**. The common receive channel from the first receive coverage area **352** and the second receive coverage area **354** are combined by  
30 the diversity combiner **338b** in order to produce an enhanced quality output receive channel.

The first plurality of receive channels can be received having a first polarization such as right-hand circular polarization, and the second plurality of  
35 receive channels can be received having a second polarization such as left-hand-circular polarization. The method can also include the steps of transmitting

-26-

signals having the second polarization from the first antenna 322a into the first receive coverage area 352, and transmitting signals having the first polarization from the second antenna 322b into the second receive coverage area 354. Accordingly, the same antennas can be used to both transmit and receive by using polarization isolation to separate the transmit and receive signals.

In this method, each of the receive channels can operate on a predetermined frequency, and the first and second pluralities of receive channels can each comprise receive channels operating on consecutive predetermined frequencies. Accordingly, the bandwidth required for the wideband receivers can be reduced.

A third receive coverage area 356 can be defined by the third antenna 322c so that a portion of the third receive coverage area 356 overlaps the first and second receive coverage areas in the overlap receive coverage area 358. A third plurality of receive channels can be received from the third receive coverage area 356 by a third wideband receiver 332c, and the third plurality of receive channels preferably includes the common receive channel. The third plurality of receive channels can be separated by the channel separator 336c. Accordingly, the common receive channel from the first, second, and third channel splitters can be combined by the diversity combiner 338b.

Antenna azimuthal radiation patterns similar to conventional 120° sector patterns can be used such that considerable overlaps of adjacent coverage areas of adjacent antennas is deliberately arranged. The space and polarization diversity combining can alternately be viewed as adaptive array processing, and can be designed either to increase desired signal reception, reduce interference, or to increase signal-to-interference ratios as described in U.S.

-27-

Patent Application Serial No. 08/284,775 entitled "Interference Rejection Combining" to Bottomley. This patent application was filed on August 2, 1994, and is hereby incorporated herein by reference.

5           As shown in Figures 6 and 7, the base station 300 of the present invention can be implemented with twelve antennas 322a-1 distributed around the mast 318 in azimuth. Each antenna can have an azimuthal pattern with a signal attenuation of -3dB over a 60° beamwidth  
10 and a signal attenuation of -12dB over a 120° beamwidth. Each antenna is preferably used to transmit only a single frequency at a time. By uniformly distributing the frequencies in azimuth, gain arises in both transmission and reception by connecting a call  
15 from a mobile station to the antenna defining the receive coverage area in which the mobile station is most centrally located.

          With twelve antennas to choose from, the mobile station can be best served by the nearest base  
20 station, in contrast to prior systems in which the nearest base station may not have an antenna pointing in the optimum direction. With azimuthally distributed frequencies, the maximum range to the best base station with twelve antennas can be reduced by 4.9dB in path  
25 loss terms. The average gain on the C/I (co-channel interference) probability distribution can be expected to be about 3dB with 12 antennas and about 2dB with 6 antennas. Further gains are possible through use of higher order diversity on interference rejection  
30 combining.

          Many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated  
35 drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed, and that modifications of these

-28-

embodiments are intended to be included within the scope of the appended claims.

-29-

THAT WHICH IS CLAIMED IS:

1. A base station for communicating with at least one mobile station in a cellular communications system, said base station comprising:

5 a plurality of receive antennas wherein each receive antenna is oriented to define a respective receive coverage area;

a support structure for supporting said plurality of receive antennas so that a first receive antenna defines a first receive coverage area and a  
10 second receive antenna defines a second receive coverage area overlapping a portion of said first receive coverage area;

a first wideband receiver operatively connected to said first receive antenna, wherein said  
15 first wideband receiver receives a first plurality of receive channels from said first receive coverage area;

a second wideband receiver operatively connected to said second receive antenna, wherein said second wideband receiver receives a second plurality of  
20 receive channels from said second receive coverage area and wherein said first and second pluralities of receive channels include at least one common receive channel;

first and second channel splitters  
25 operatively connected to said respective first and second wideband receivers for separating said first and second pluralities of receive channels; and

a diversity combiner operatively connected to said first and second channel splitters  
30 for combining said common receive channel from said first and second channel splitters to produce an enhanced quality output receive channel.

-30-

2. A base station according to Claim 1 wherein said first receive antenna receives signals having a first polarization and said second receive antenna receives signals having a second polarization  
5 different from said first polarization, and wherein said diversity combiner comprises a polarization diversity combiner.

3. A base station according to Claim 2 wherein said first polarization comprises right-hand-  
10 circular polarization and said second polarization comprises left-hand-circular polarization.

4. A base station according to Claim 2 wherein said first and second receive antennas are adjacent receive antennas.

15 5. A base station according to Claim 2 wherein said first antenna defines a first transmit coverage area and transmits signals having said second polarization, and wherein said second antenna defines a second transmit coverage area and transmits signals  
20 having said first polarization.

6. A base station according to Claim 1 further comprising:

a third receive antenna defining a third receive coverage area overlapping portions of said  
25 first and second receive coverage areas;

a third wideband receiver operatively connected to said third receive antenna, wherein said third wideband receiver receives a third plurality of receive channels from said third receive coverage area  
30 and wherein said third plurality of receive channels includes said at least one common receive channel;

-31-

a third channel splitter operatively connected to said third wideband receiver for separating said third plurality of receive channels; and

5                    wherein said diversity combiner is operatively connected to said first, second, and third channel splitters for combining said common receive channel from said first, second, and third channel splitters to produce an enhanced quality output receive  
10 channel.

7.    A base station according to Claim 1 wherein each of said receive channels operates on a predetermined frequency and said first and second pluralities of receive channels each comprise receive  
15 channels operating on consecutive predetermined frequencies.

8.    A base station for communicating with at least one mobile station in a cellular communications system, said base station comprising:

20                    a plurality of receive antennas wherein each receive antenna is oriented to define a respective receive coverage area;

                    a support structure for supporting said plurality of receive antennas so that a first receive  
25 antenna defines a first receive coverage area, a second receive antenna adjacent said first receive antenna defines a second receive coverage area overlapping a portion of said first receive coverage area, and a  
                    third receive antenna adjacent said second receive  
30 antenna defines a third receive coverage area overlapping portions of said first and second receive coverage areas;

                    a first wideband receiver operatively connected to said first receive antenna, wherein said

-32-

first wideband receiver receives a first plurality of receive channels from said first receive coverage area;

5 a second wideband receiver operatively connected to said second receive antenna, wherein said second wideband receiver receives a second plurality of receive channels from said second receive coverage area;

10 a third wideband receiver operatively connected to said third receive antenna, wherein said third wideband receiver receives a third plurality of receive channels from said third receive coverage area and wherein said first, second, and third pluralities of receive channels include at least one common receive channel;

15 first, second, and third channel splitters operatively connected to said respective first, second, and third wideband receivers for separating said first, second, and third pluralities of receive channels; and

20 a diversity combiner operatively connected to said first, second, and third channel splitters for combining said common receive channel from said first, second, and third channel splitters to produce an enhanced quality output receive channel.

25 9. A base station according to Claim 8 wherein first and third receive antennas receive signals having a first polarization and said second receive antenna receives signals having a second polarization different from said first polarization,  
30 and wherein said diversity combiner comprises a polarization diversity combiner.

-33-

10. A base station according to Claim 9 wherein said first and third antennas define respective first and third transmit coverage areas and transmit signals having said second polarization, and wherein  
5 said second antenna defines a second transmit coverage area and transmits signals having said first polarization.

11. A base station according to Claim 9 wherein said first polarization comprises right-hand-circular polarization and said second polarization  
10 comprises left-hand-circular polarization.

12. A base station according to Claim 8 wherein each of said receive channels operates on a predetermined frequency and said first, second, and  
15 third pluralities of receive channels each comprise receive channels operating on consecutive frequencies.

13. A method for communicating with at least one mobile station, said method comprising the steps of:  
20 receiving a first plurality of receive channels from a first receive coverage area;  
receiving a second plurality of receive channels from a second receive coverage area which overlaps a portion of said first receive coverage area,  
25 wherein said first and second pluralities of receive channels include at least one common receive channel;  
separating said common receive channel from each of said first and second pluralities of receive channels; and  
30 combining said common receive channel from said first and second receive coverage areas to produce an enhanced quality output receive channel.

-34-

14. A method according to Claim 13 wherein said step of receiving said first plurality of receive channels comprises receiving said first plurality of receive channels having a first polarization, and  
5 wherein said step of receiving said second plurality of receive channels comprises receiving said second plurality of receive channels having a second polarization different from said first polarization.

15. A method according to Claim 14 wherein  
10 said first polarization comprises right-hand-circular polarization and said second polarization comprises left-hand-circular polarization.

16. A method according to Claim 14 further comprising the steps of:  
15 transmitting signals having said second polarization into said first receive coverage area; and  
transmitting signals having said first polarization into said second receive coverage area.

17. A method according to Claim 13 further  
20 comprising the steps of:  
receiving a third plurality of receive channels from a third receive coverage area which overlaps portions of said first and second receive coverage areas, and wherein said third plurality of  
25 receive channels includes said at least one common receive channel;  
separating said third plurality of receive channels; and  
wherein said combining step further  
30 comprises combining said common receive channel from said first, second, and third channel splitters.

-35-

18. A method according to Claim 13 wherein each of said receive channels operates on a predetermined frequency and said first and second pluralities of receive channels each comprise receive
- 5 channels operating on consecutive predetermined frequencies.

## AMENDED CLAIMS

[received by the International Bureau on 09 September 1997 (09.09.97);  
original claims 1,5,6,9,11 and 22 amended;  
original claim 4 cancelled;  
remaining claims unchanged (5 pages)]

1. A method of depositing a metal sulfide film on  
a substrate, said method comprising the steps of:

preparing a solution containing at least one metal  
compound precursor comprising;

- 5                   a) at least one thiocarboxylate ligand SECR,  
                    wherein E is selected from the group  
                    consisting of O and S and wherein R is  
                    selected from the group consisting of alkyl,  
                    aryl, substituted alkyl, substituted aryl,  
10                   halogenated alkyl, and halogenated aryl, and  
                    b) at least one coordinated ligand L selected  
                    from the group of monodentate ligands and  
                    multidentate ligands;

heating the substrate to a reaction temperature;

- 15                   evaporating the solution to form vapors of said metal  
                    compound precursor; and

                    contacting the vapors and the substrate heated to  
                    said reaction temperature, said reaction temperature sufficient to  
                    decompose said metal compound precursor to form said metal  
20                   sulfide film of at least one metal M on the substrate.

2. A method according to claim 1, wherein the  
metal of said metal compound precursor is selected from the

group consisting of Ca, Sr, Ba, Zn, Cd, Pb, Ga, In, Sb, and Bi.

3. A method according to claim 1, further comprising the step of producing an aerosol from the solution before the step of evaporating.

5. A method according to claim 1, wherein said metal compound precursor is  $M(\text{SECR})_n\text{L}_m$ .

6. A method according to claim 1, further including the step of selecting the multidentate ligand from the group consisting of cyclic polyethers, acyclic polyethers, cyclic polyamines, and acyclic polyamines.

7. A method according to claim 6, wherein the acyclic polyethers include diglyme, triglyme, tetraglyme, and derivatives of diglyme, triglyme, and tetraglyme.

8. A method according to claim 6, wherein the polyamines include ethylene diamine and derivatives thereof and diethylene triamine and derivatives thereof.

9. A method according to claim 1, further including the step of selecting the multidentate ligand from the group of crown ethers.

10. A method according to claim 9, wherein the group of crown ethers includes 18-crown-6 ether and derivatives thereof and 15-crown-5 ether and derivatives thereof.

11. A method according to claim 1, further including the step of selecting the monodentate ligand from the

group consisting of an ether and an amine.

12. A method according to claim 1, further comprising the step of annealing at a preset annealing temperature the metal sulfide film formed on the substrate.

13. A method according to claim 12, wherein said step of annealing includes a step of providing an inert atmosphere for the substrate and the metal sulfide film.

14. A method according to claim 12, wherein said step of annealing includes a step of selecting the preset annealing temperature to be below 700°C.

15. A method according to claim 12, wherein said step of annealing includes a step of selecting the preset annealing temperature to be identical to the reaction temperature.

16. A method according to claim 1, further including the steps of adding to the solution at least one dopant compound comprising a metal dopant selected from the group consisting of Cu, Ag, Au, Eu, Dy, Ho, Er, Tb, Pr, and Ce and selecting a concentration of said metal dopant to be less than 10 weight-% of the metal sulfide film.

17. A method according to claim 1, further including the step of selecting said reaction temperature to be between 85°C and 600°C.

18. A method according to claim 1, further including the step of selecting a preheating temperature for the

step of evaporating to be between 70°C and 250°C.

19. A method according to claim 1, wherein said solution contains a first one of said metal compound precursors and a second one of said metal compound precursors to produce a mixed metal sulfide film, wherein said first metal compound precursor contains a different metal than said second metal compound precursor.

20. A method according to claim 19, wherein said solution contains a third one of said metal compound precursors and wherein said third metal compound precursor contains a different metal than said first and said second metal compound precursors.



21. A method according to claim 19, further including the steps of adding to the solution of said first and said second metal compound precursors at least one dopant compound comprising a metal dopant selected from the group consisting of Mn, Cu, Ag, Au, Eu, Dy, Ho, Er, Tb, Pr, and Ce and selecting a concentration of the metal dopant to be less than 10 weight-% of the mixed metal sulfide film.

22. A method according to claim 1, comprising the step of selecting the substrate from the group consisting of a silicon substrate, a glass substrate, an indium tin oxide substrate, and an aluminum tin oxide substrate.

23. A method according to claim 1, wherein said

metal compound precursor is  $(R^1O)_nM(SECR)_m$ , wherein  $R^1$  is alkyl, aryl, substituted alkyl and substituted aryl.

1/13

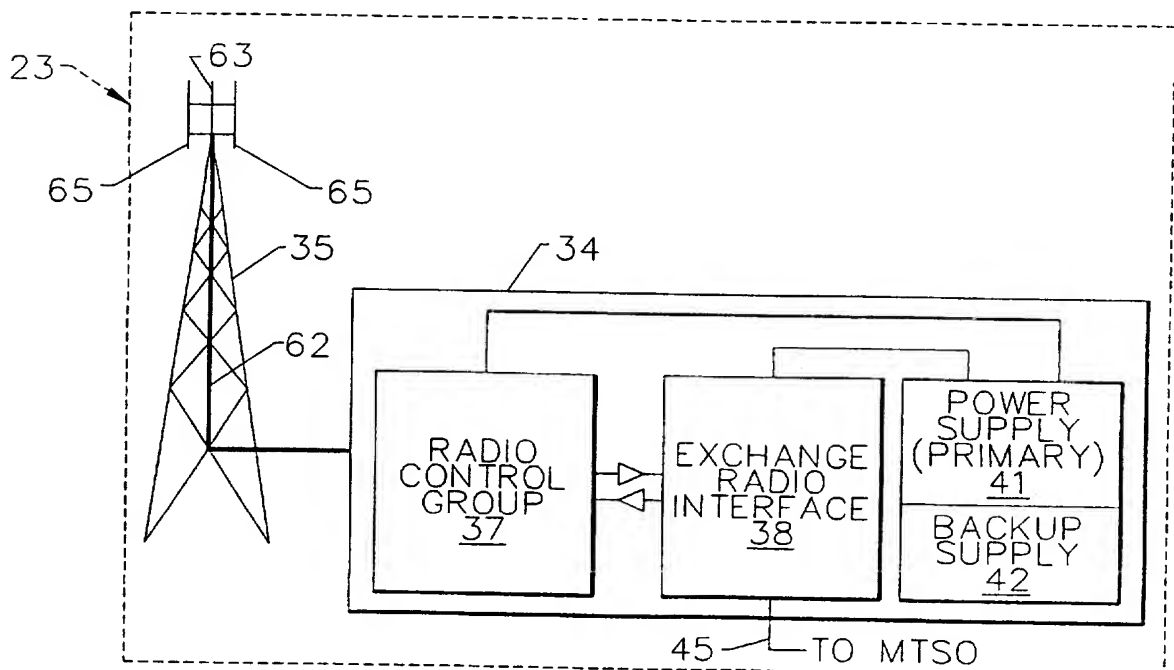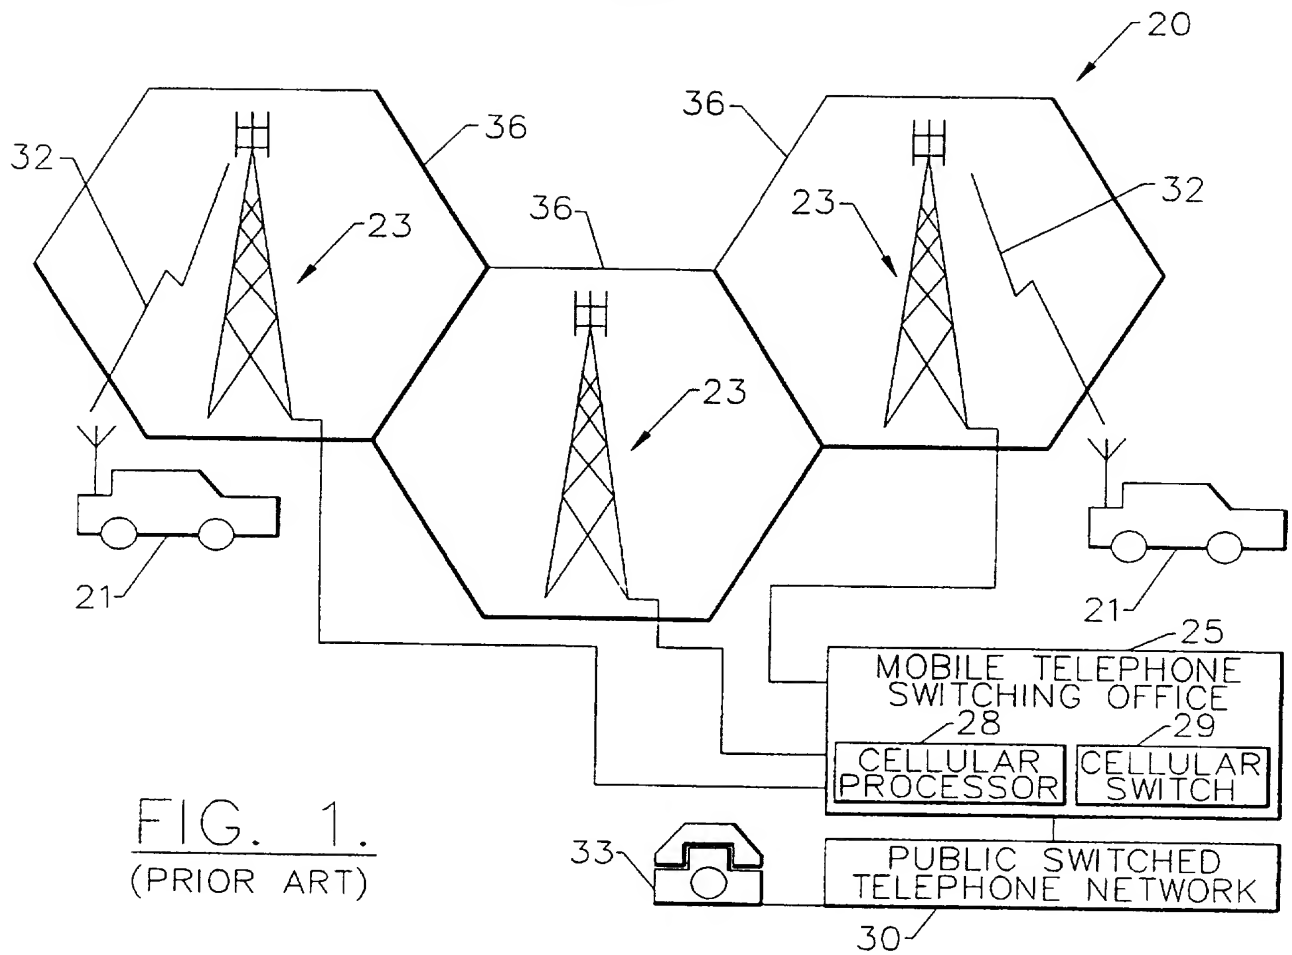

2/13



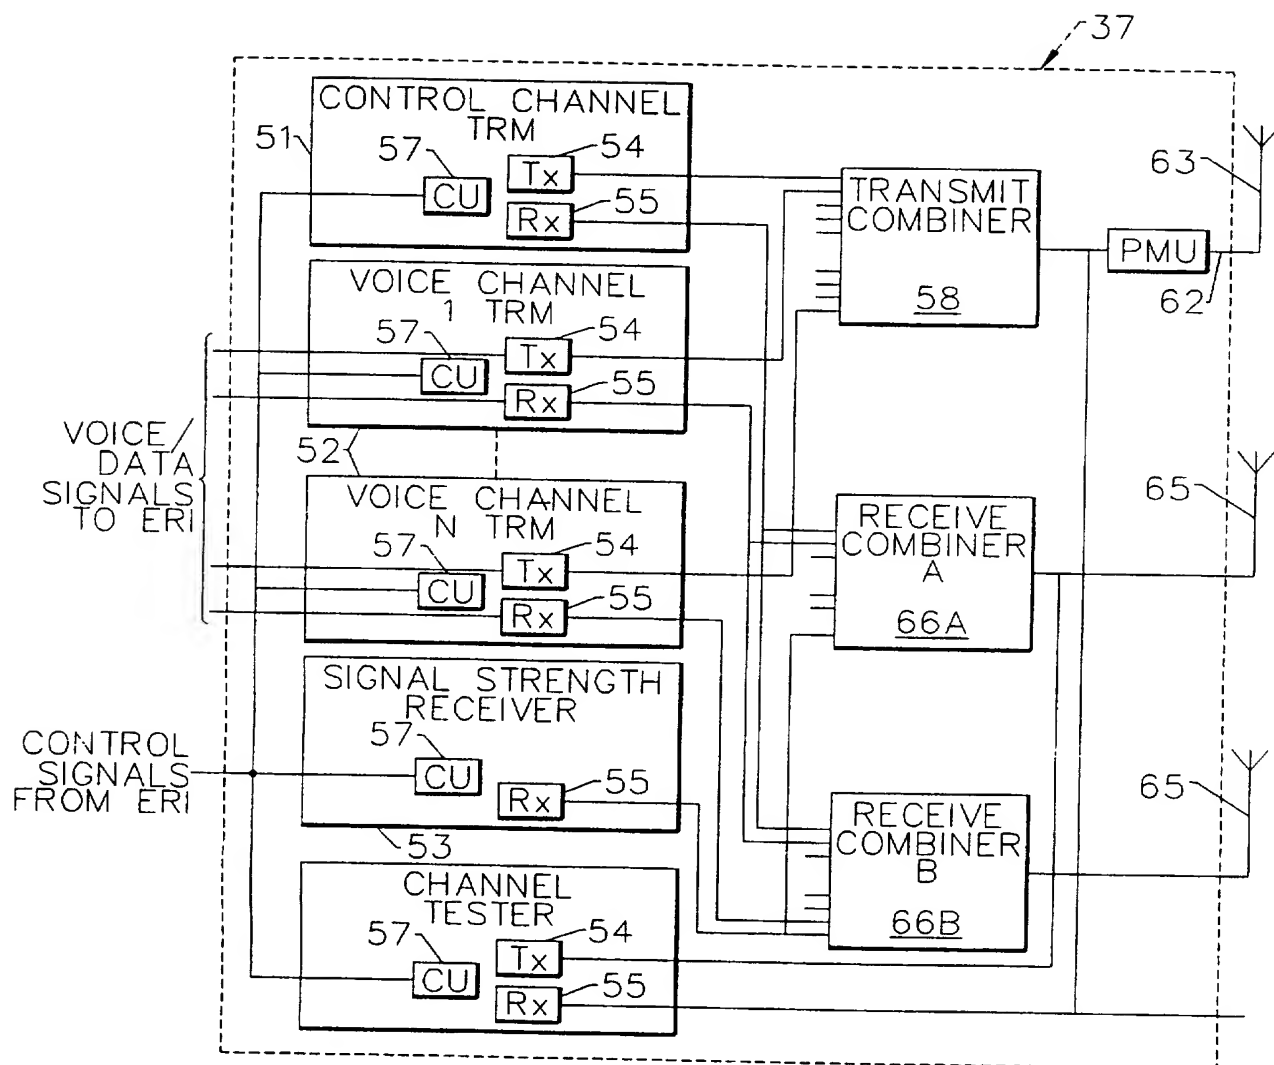


FIG. 3.  
(PRIOR ART)

3/13

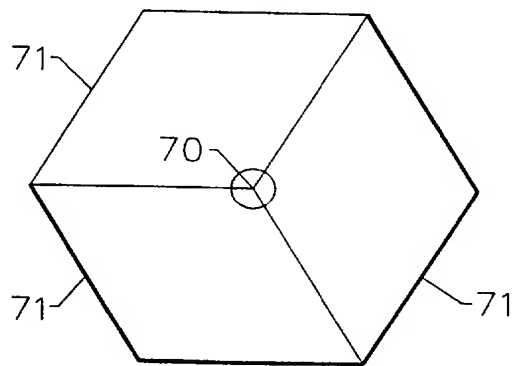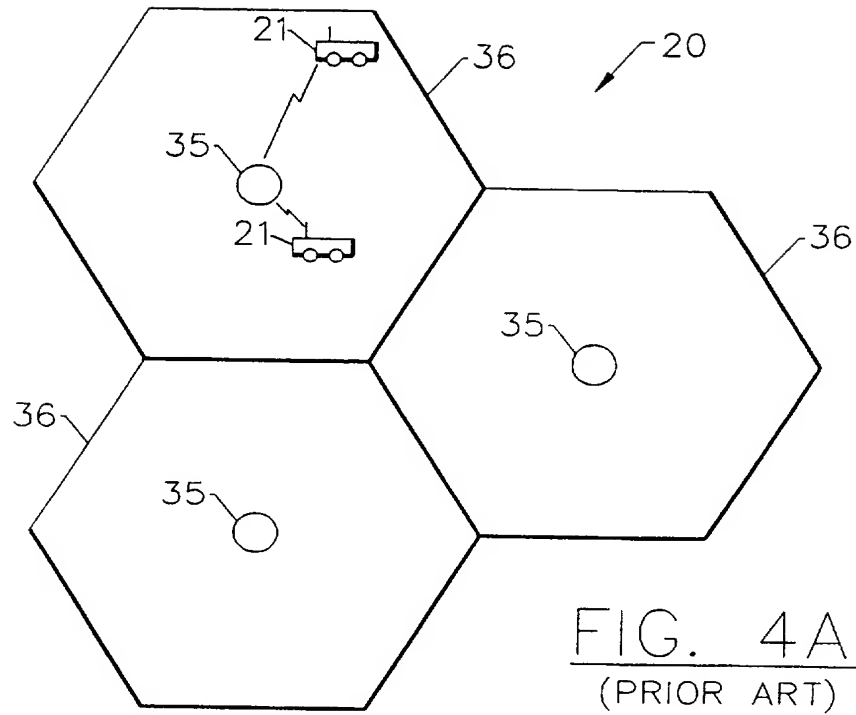

4/13



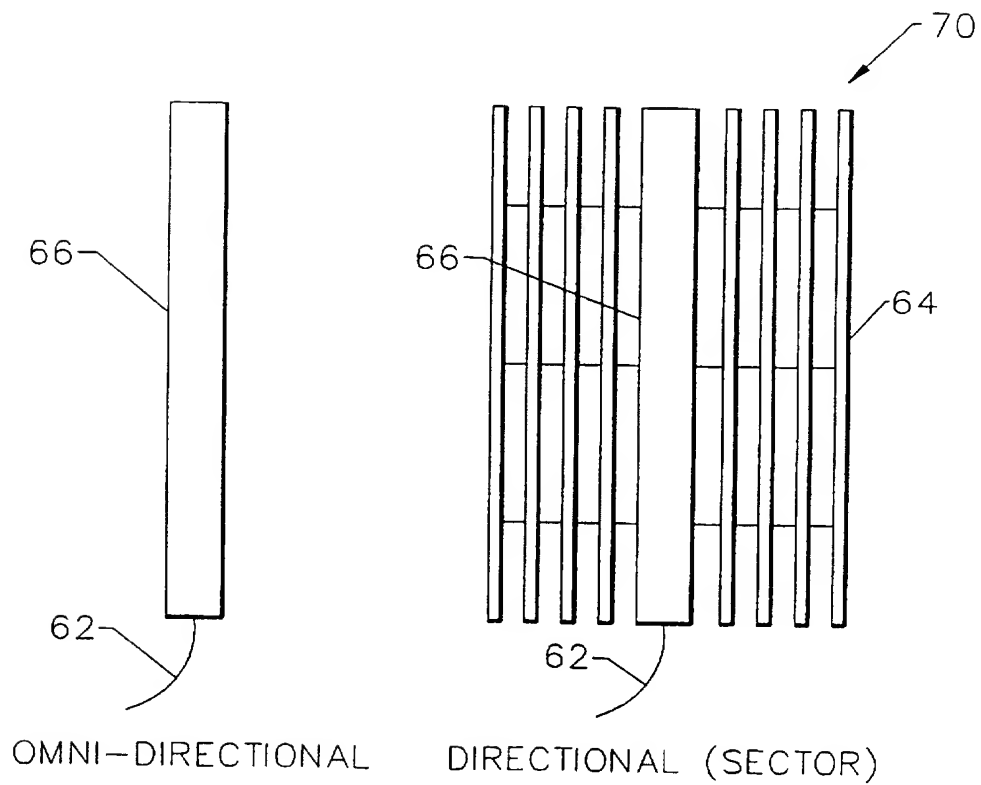


FIG. 5B.  
(PRIOR ART)


5/13

FIG. 6

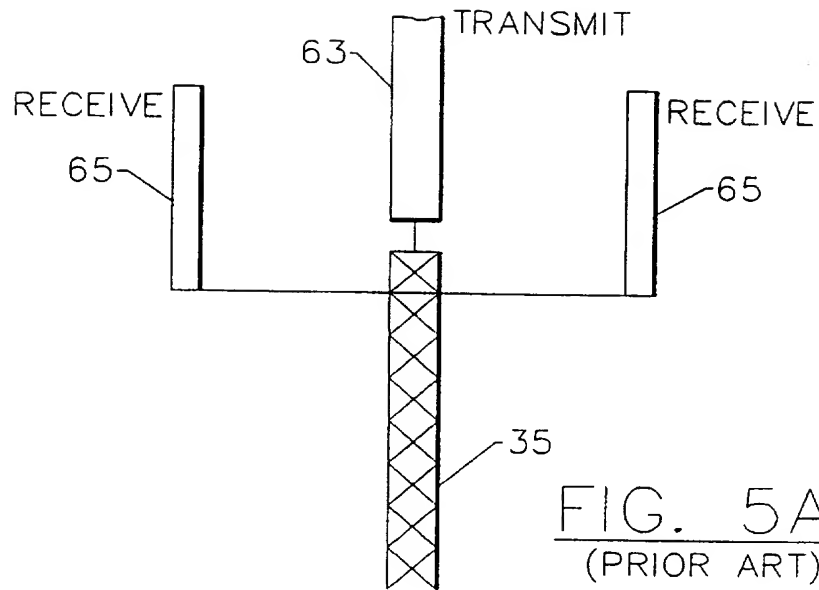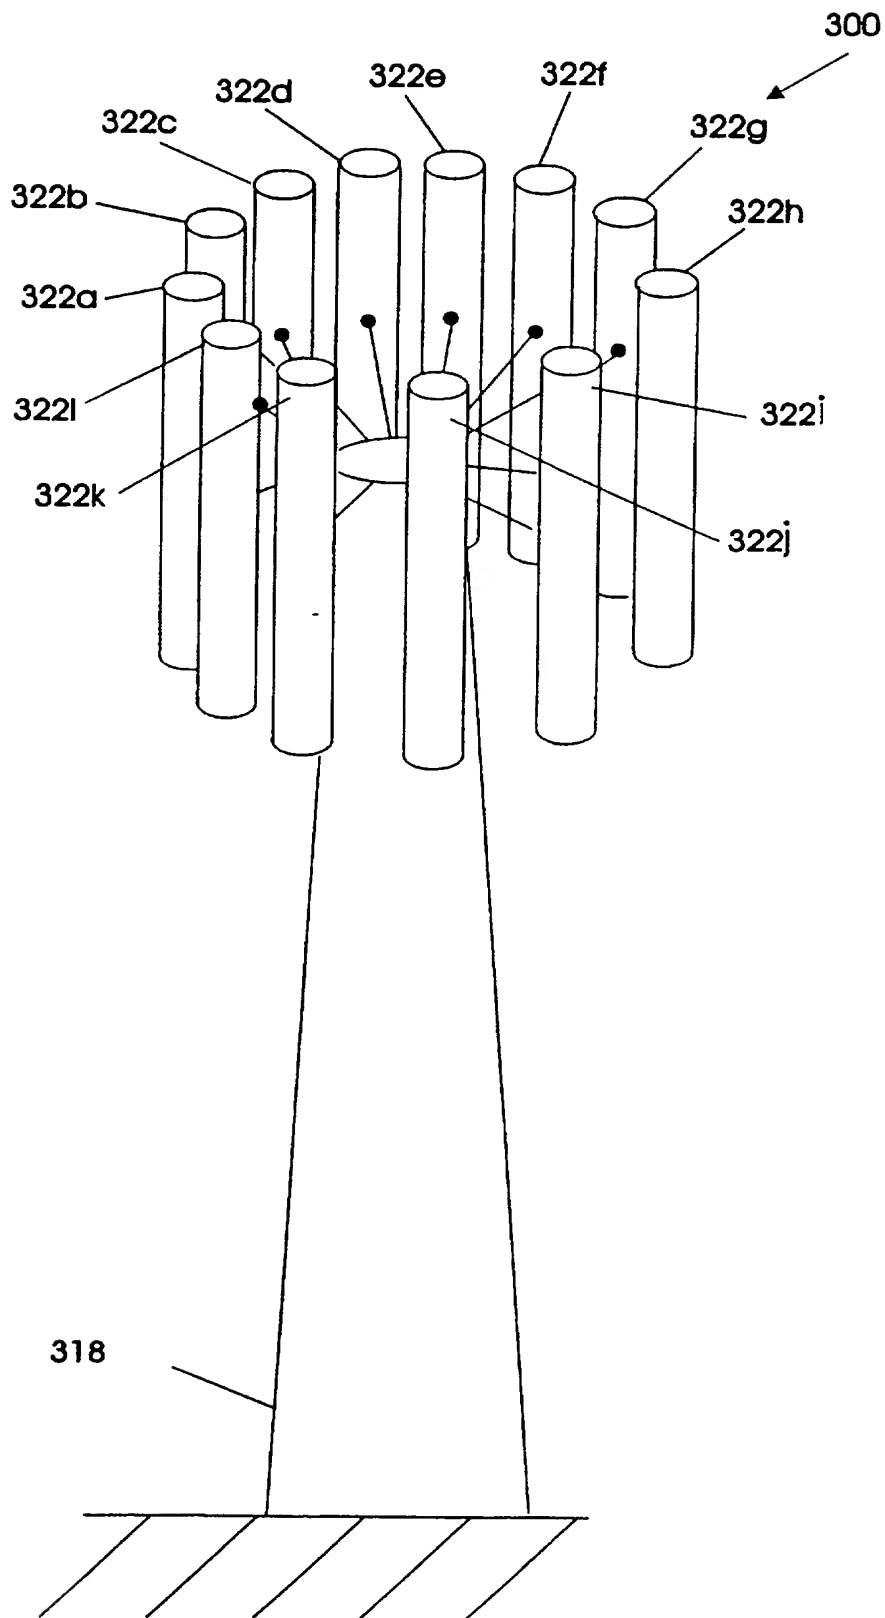


6/13

FIG. 7

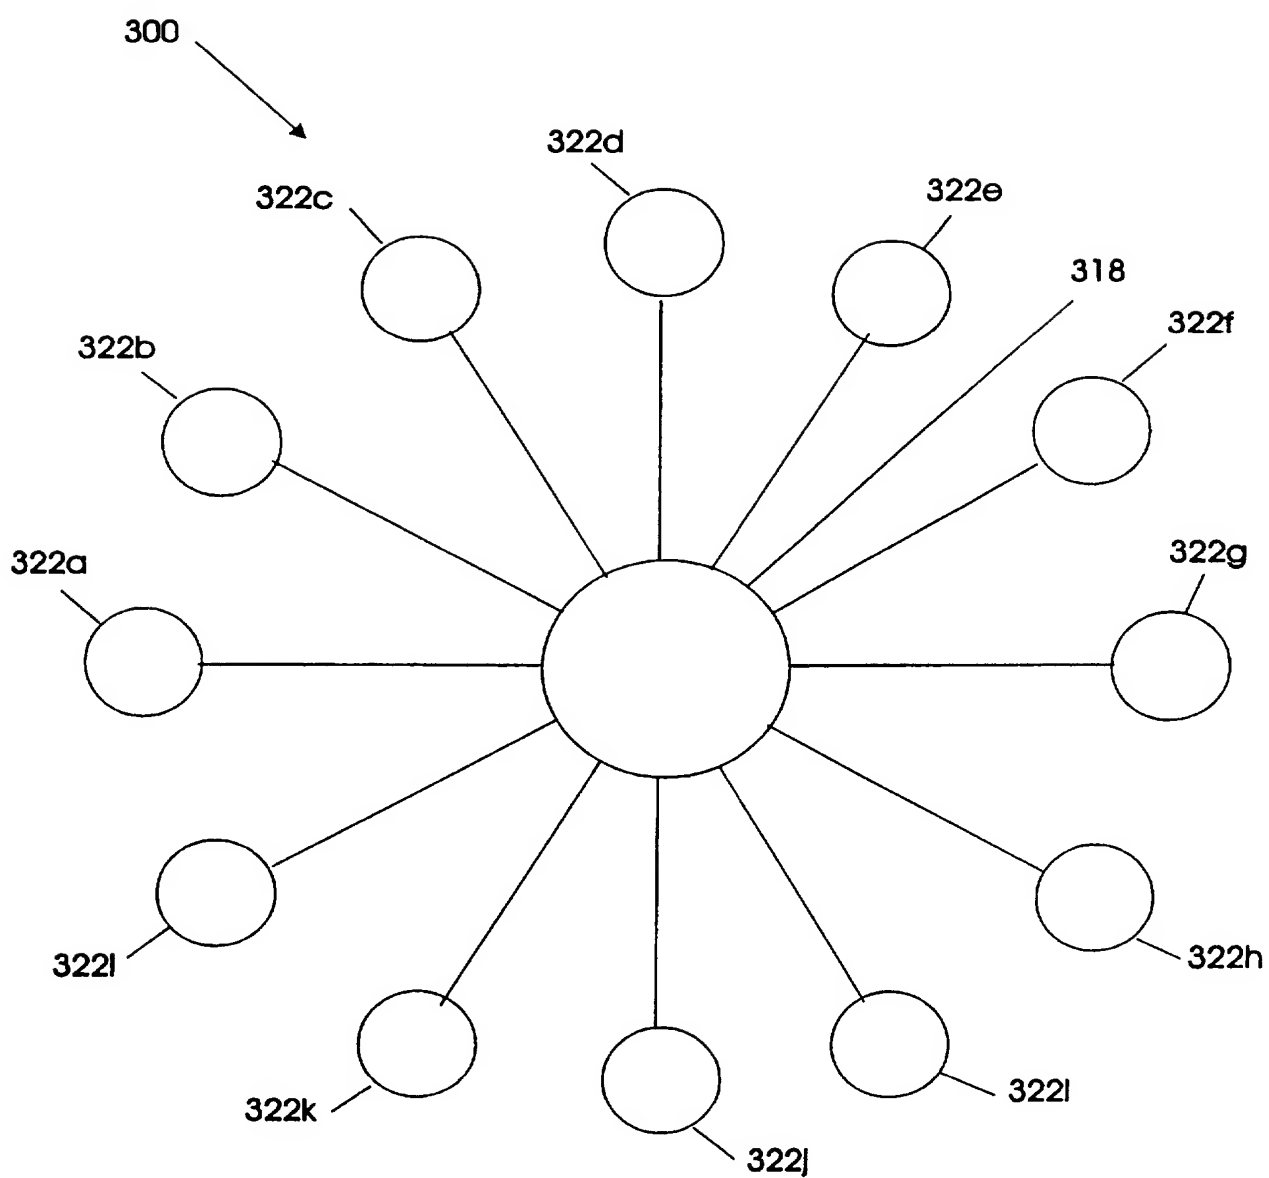


7/13



FIG. 8

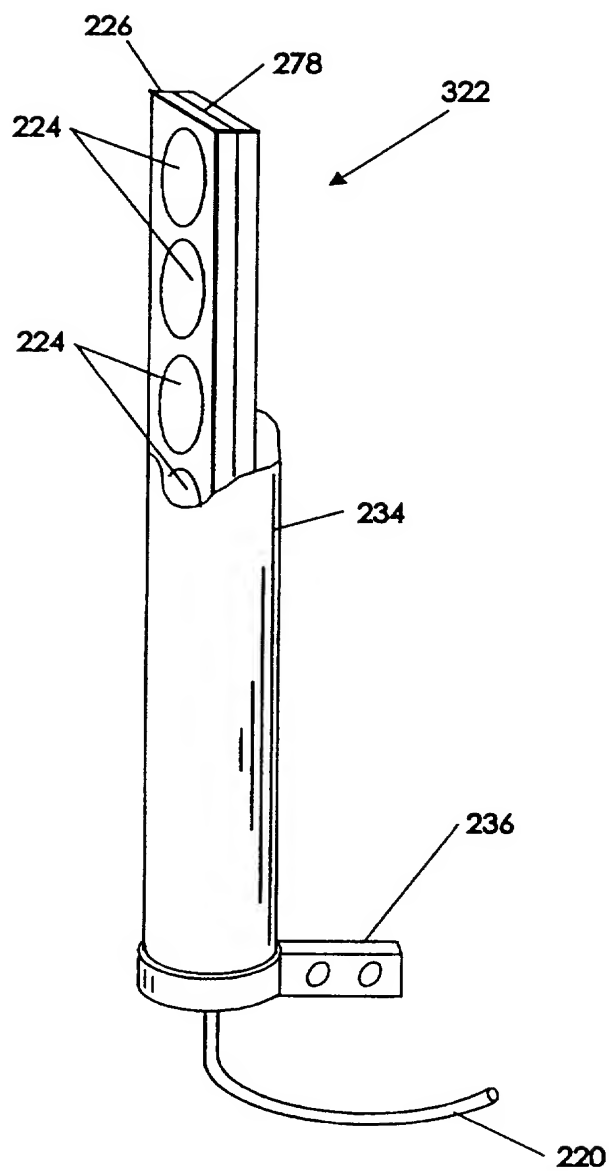

8/13

FIG. 9

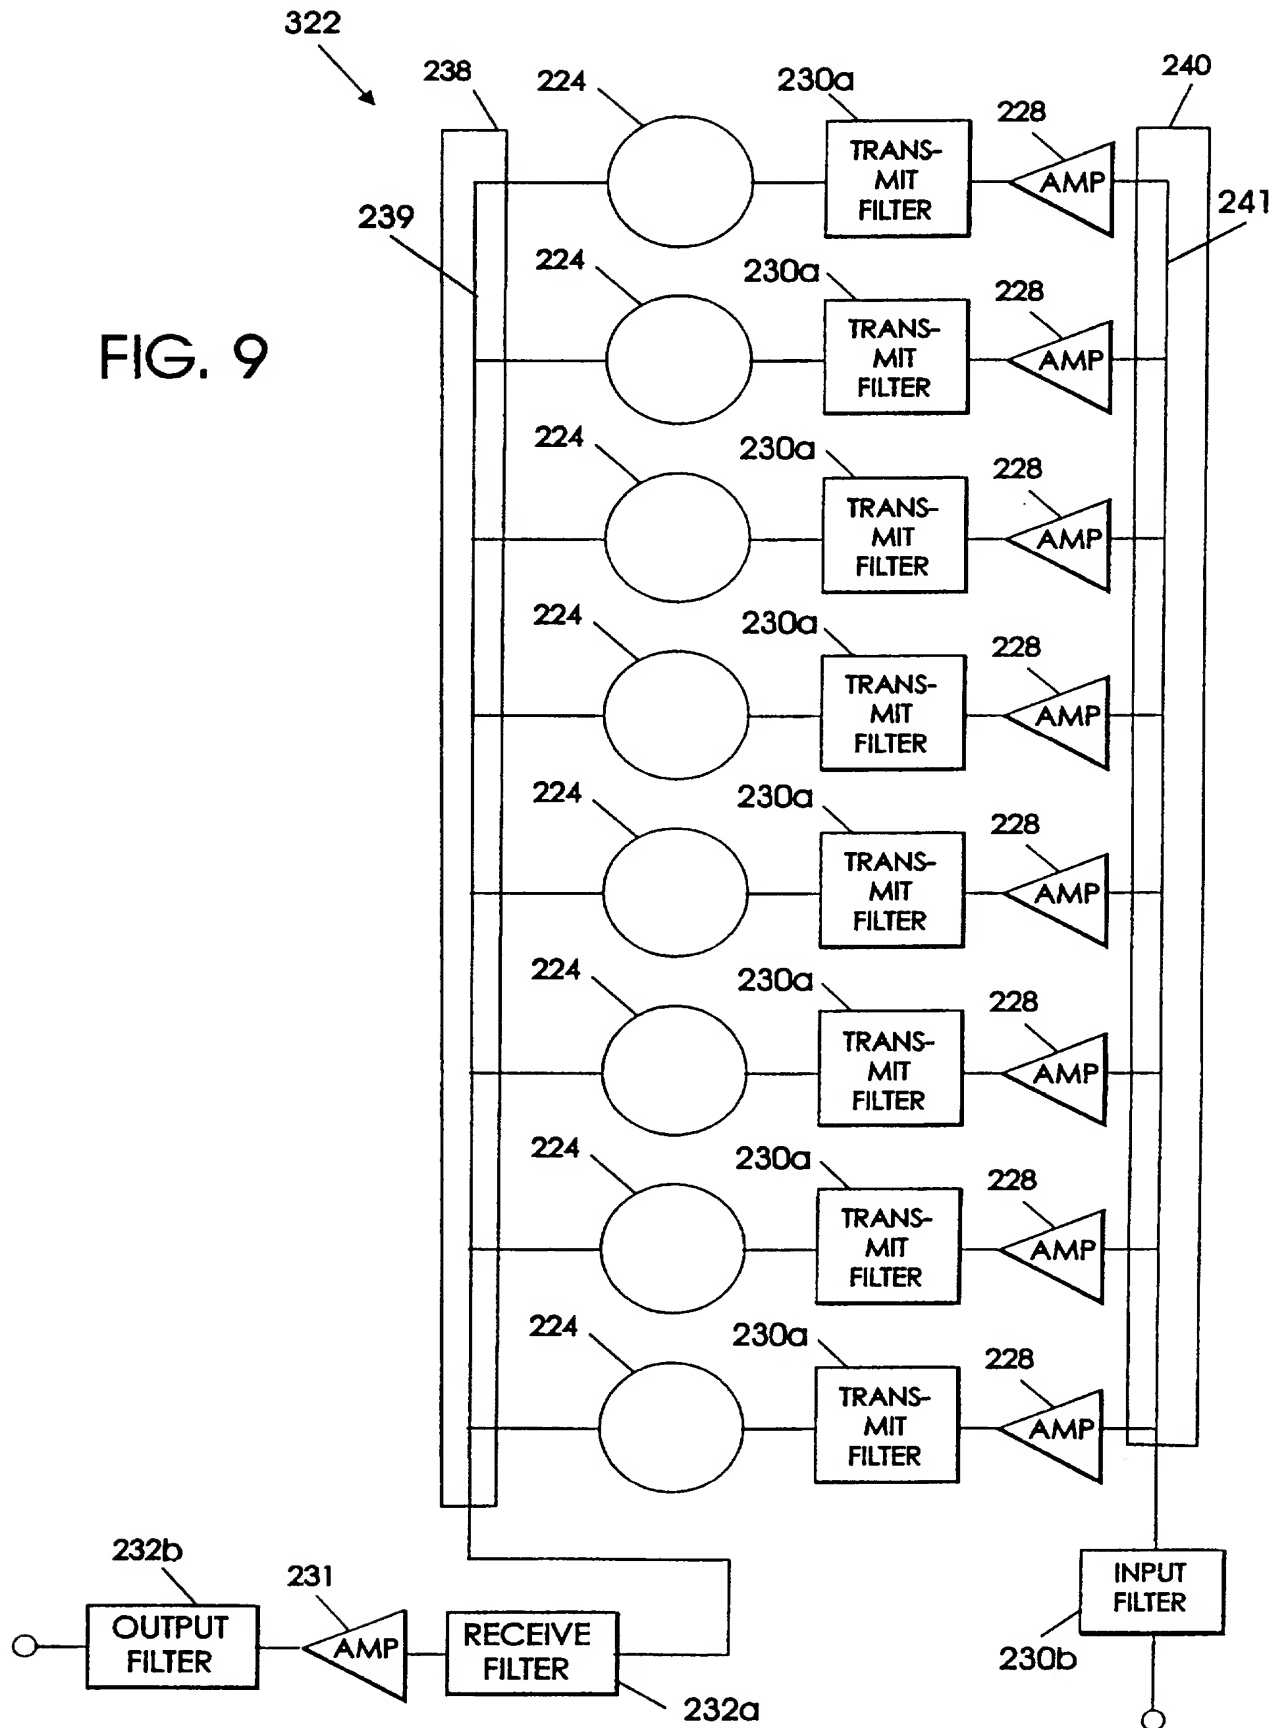

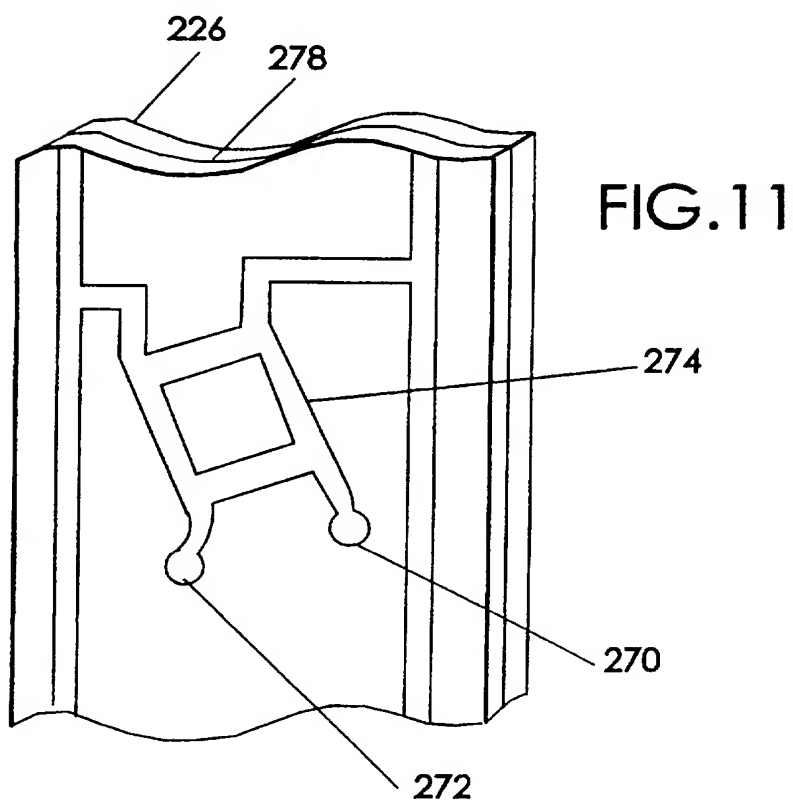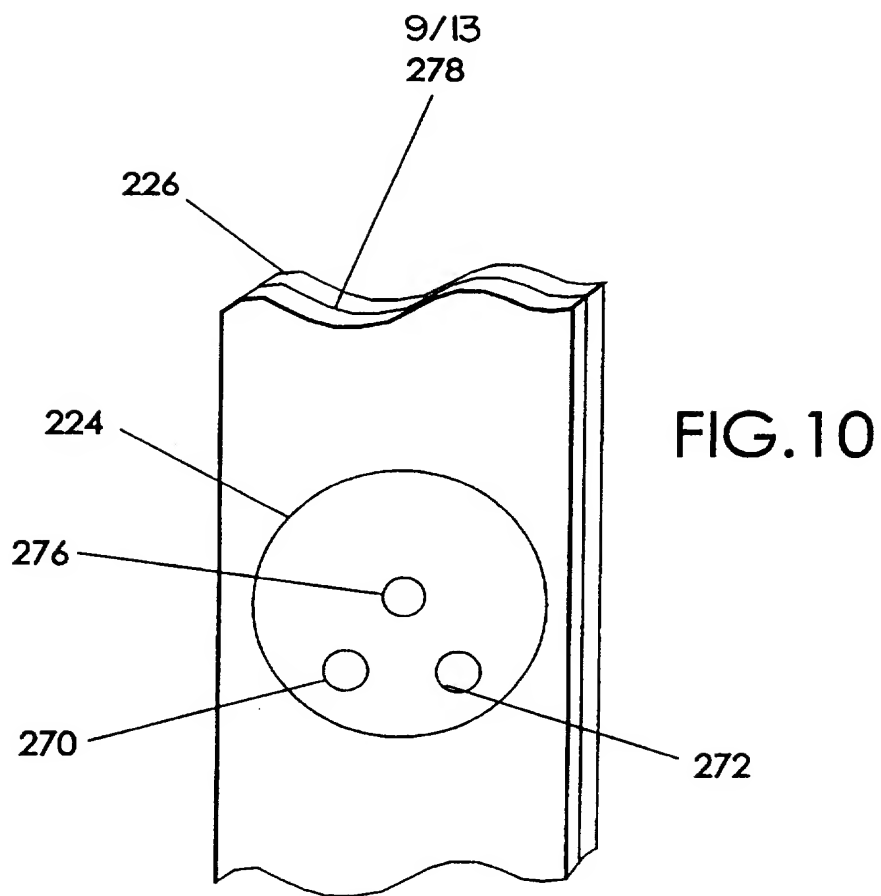

10/13

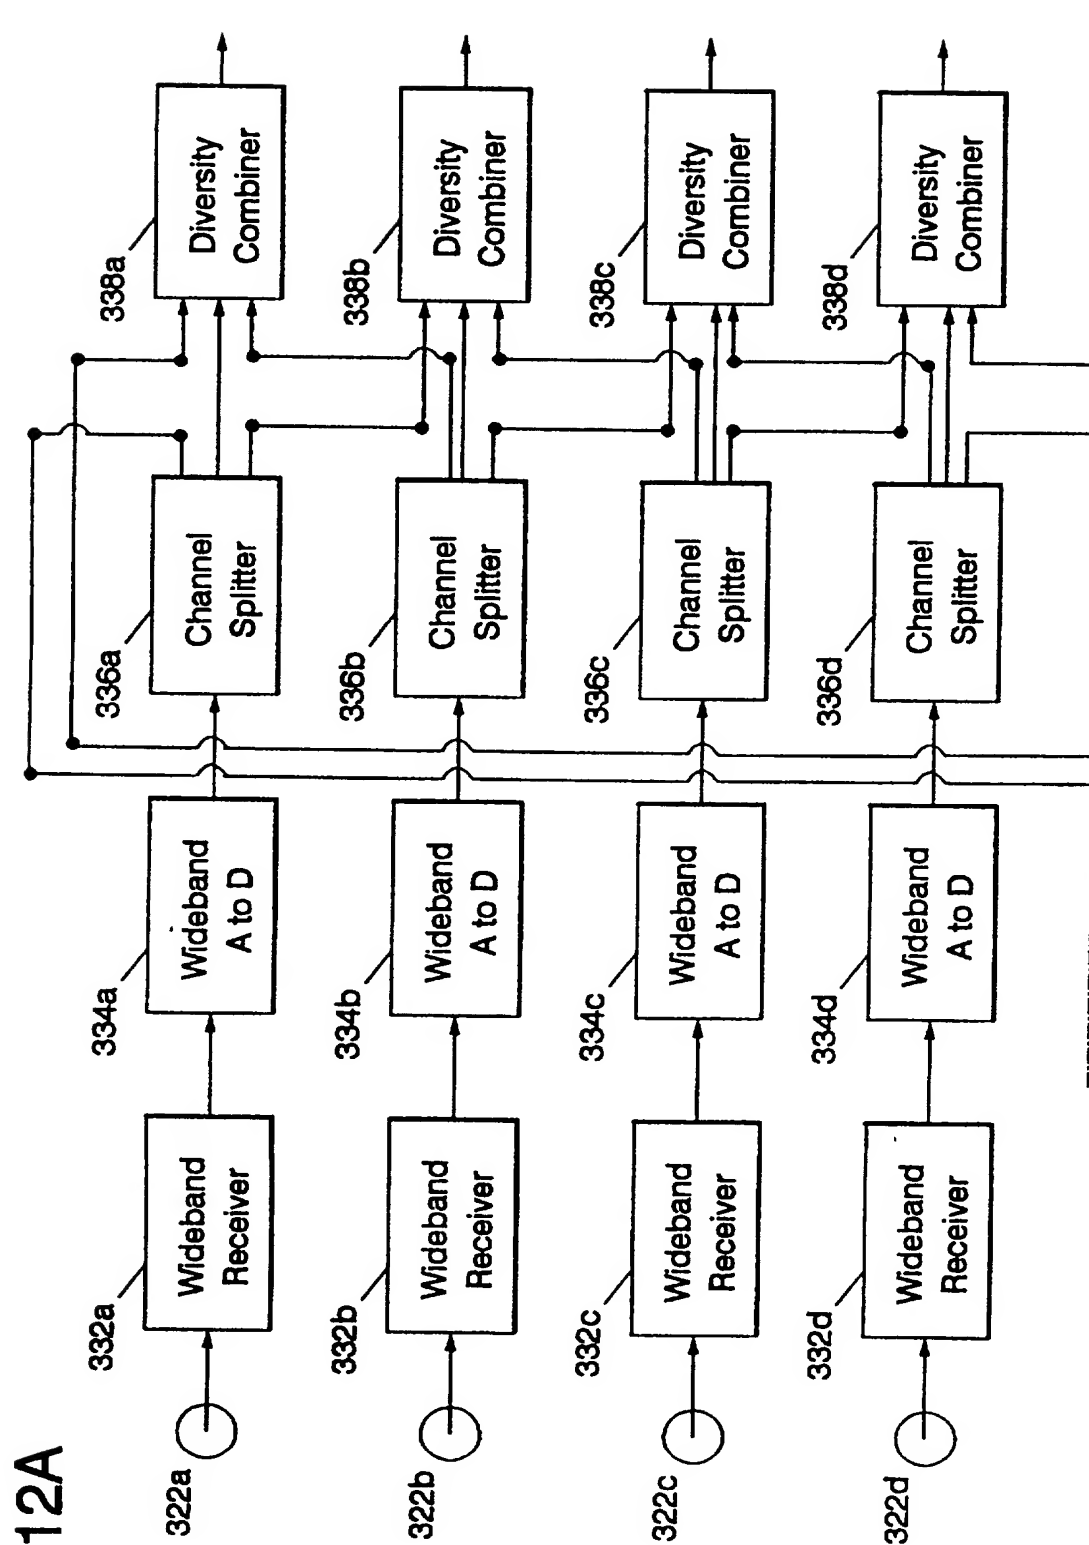
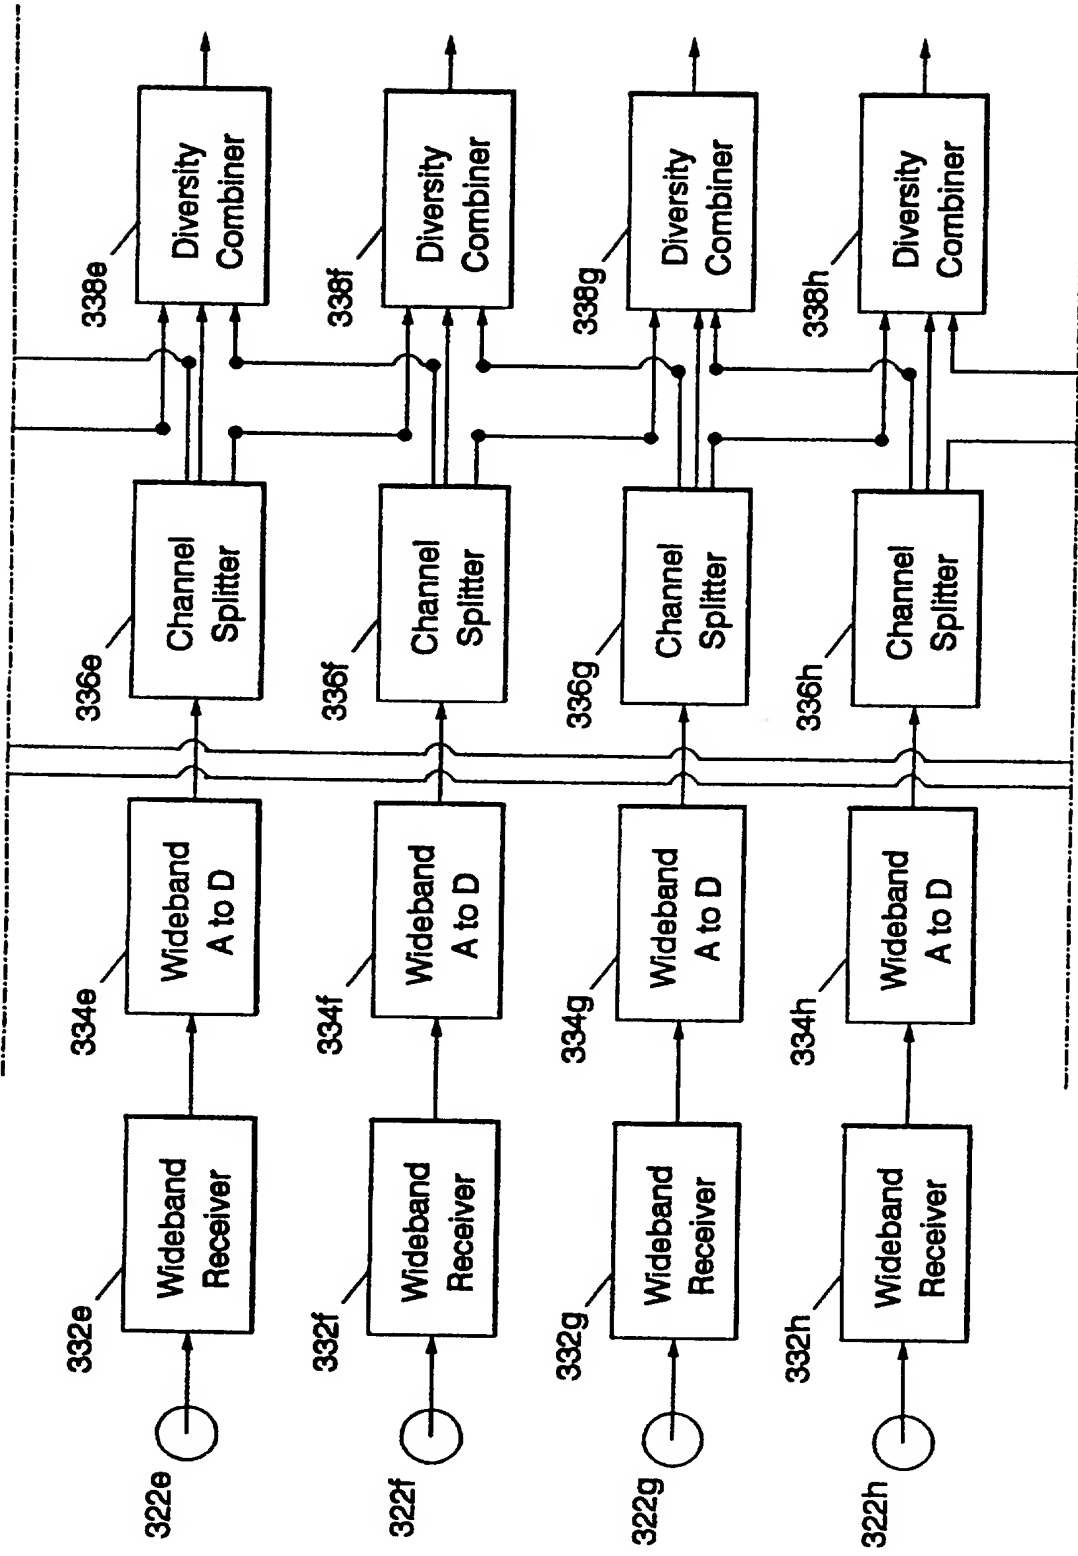


FIG. 12B



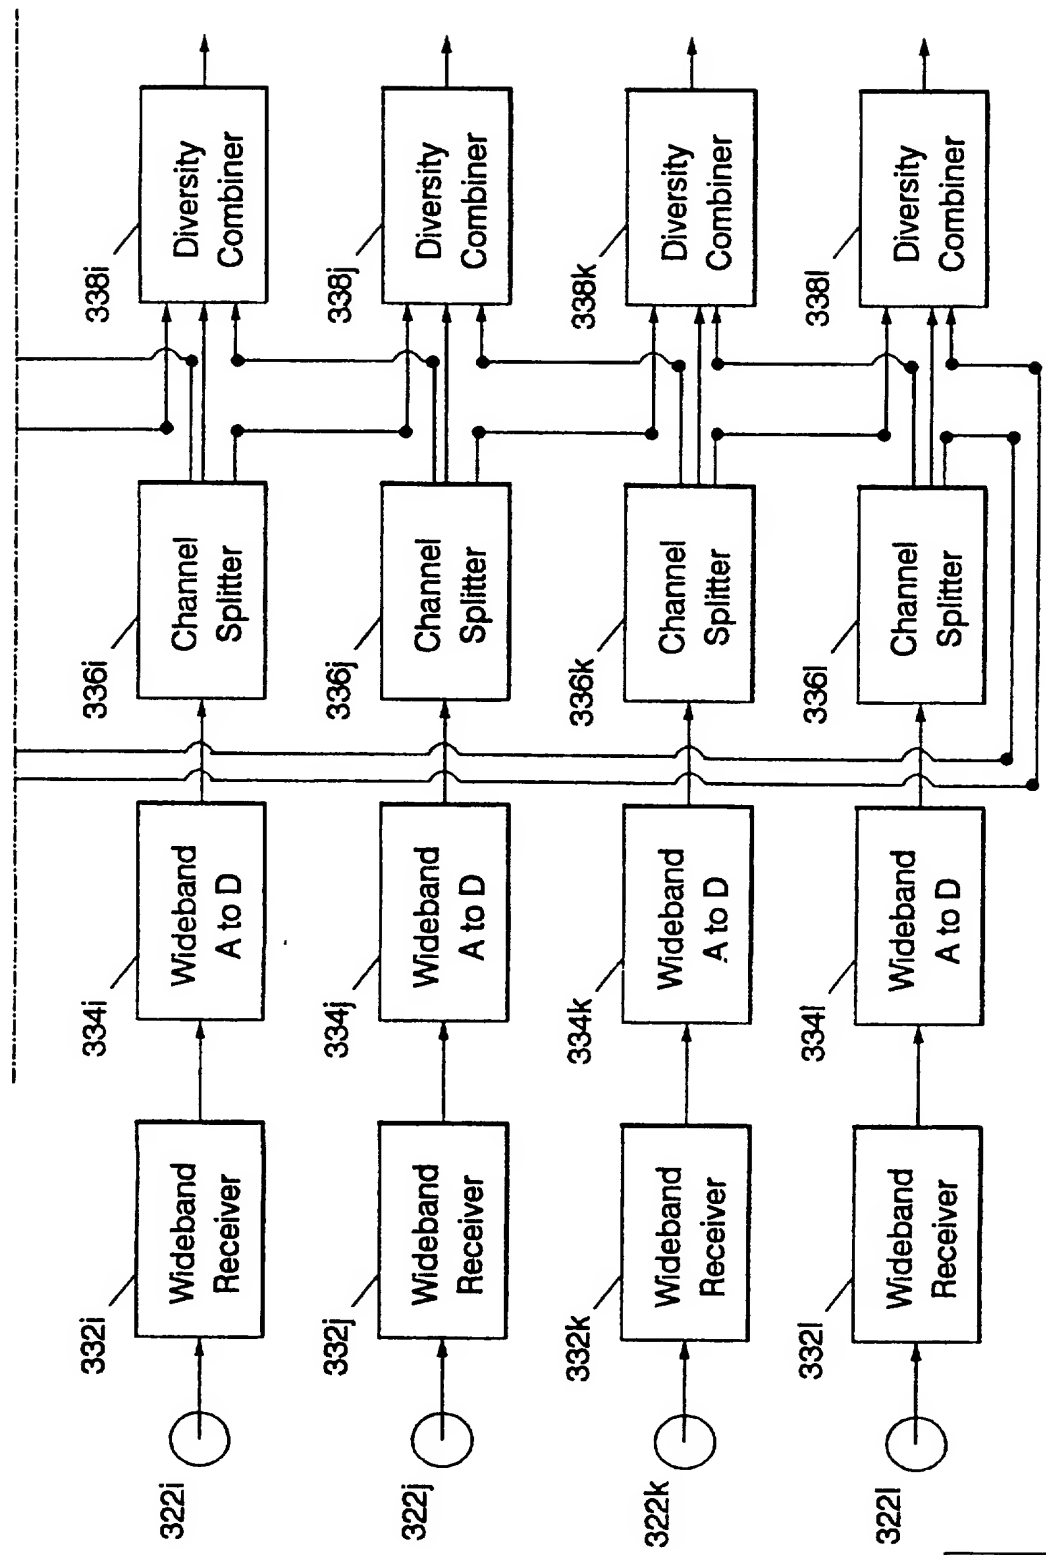



FIG. 12C

FIG. 12A
FIG. 12B
FIG. 12C

FIG. 12

13/13

FIG. 13

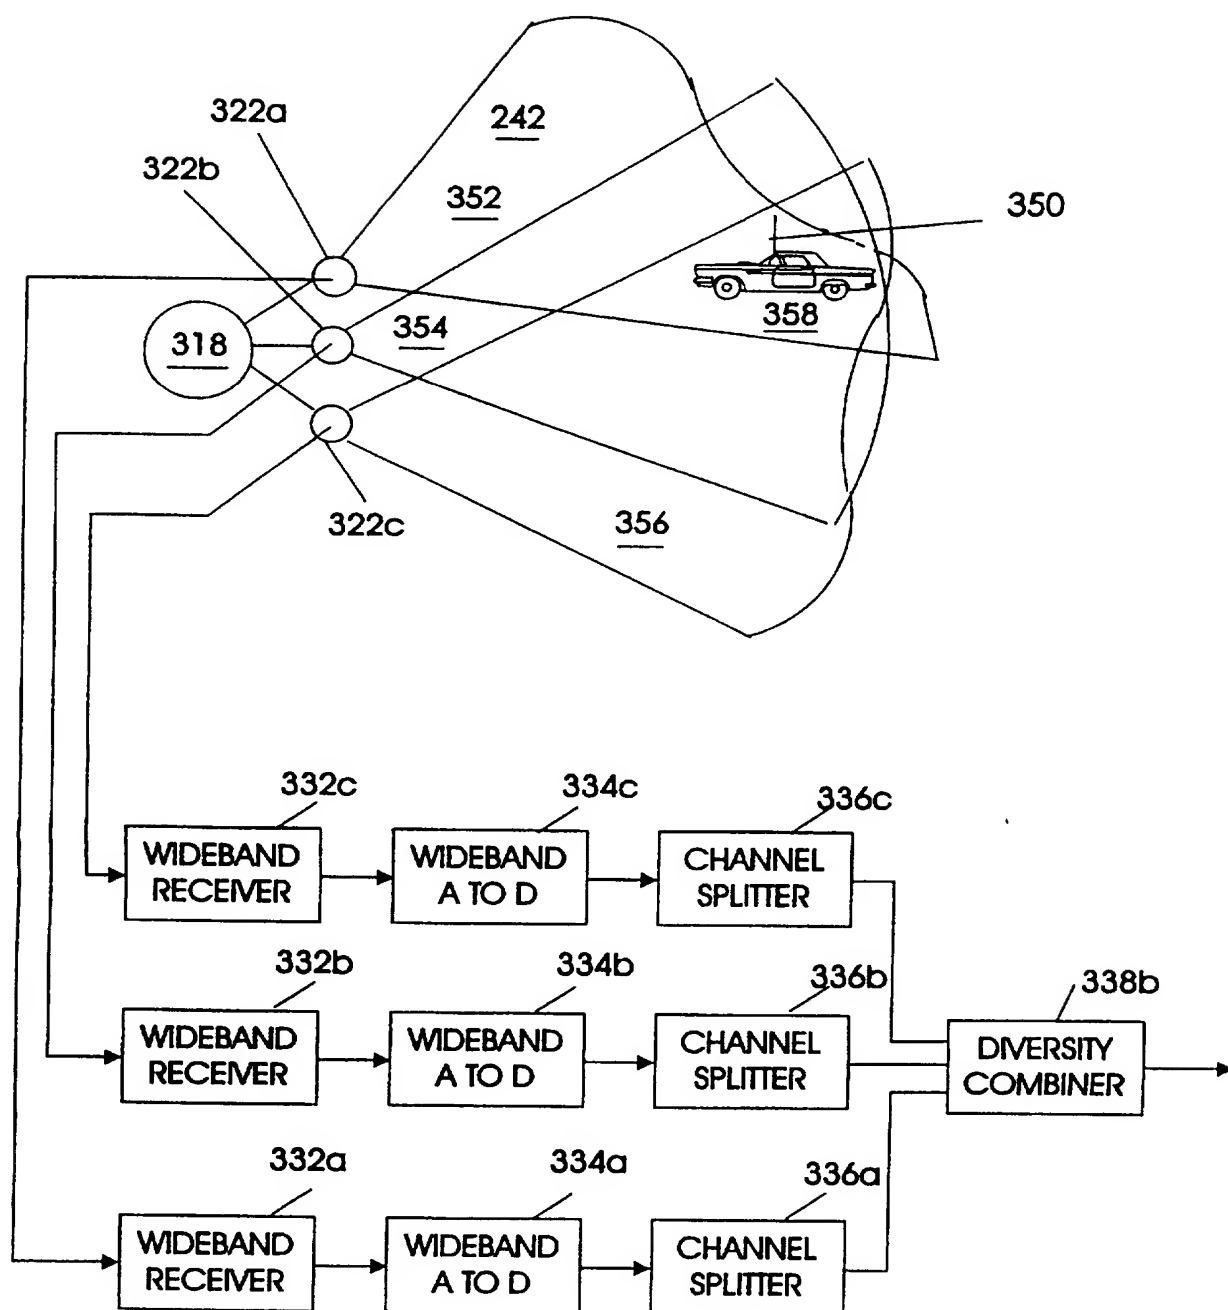

# INTERNATIONAL SEARCH REPORT

Intern. Appl. No.

PCT/US 97/05105

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04B7/10 H04B7/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04B H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 591 770 A (MOTOROLA LTD) 13 April 1994 * abstract * see column 1, line 23 - line 53 see column 3, line 5 - line 53 see column 4, line 23 - line 35 see column 4, line 57 - column 5, line 15 see figures 4,6	1,8,13
Y	EP 0 650 268 A (AT & T CORP) 26 April 1995 * abstract * see column 2, line 18 - line 40 see claim 1 see figure 1	1-5, 13-17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*&\* document member of the same patent family

Date of the actual completion of the international search

27 August 1997

Date of mailing of the international search report

28.08.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Lopez Marquez, T

# INTERNATIONAL SEARCH REPORT

Internat. Application No  
PCT/US 97/05105

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>LEE W C Y ET AL: "Polarization diversity system for mobile radio" IEEE TRANSACTIONS ON COMMUNICATIONS, OCT. 1972, USA, vol. COM-20, no. 5, ISSN 0090-6778, pages 912-923, XP002035417 see page 913, left-hand column, line 27 - page 915, left-hand column, line 16 see figures 1-3</p> <p style="text-align: center;">---</p>	<p>2-5, 14-16</p>
Y	<p>US 4 597 105 A (FREEBURG THOMAS A) 24 June 1986 * abstract * see column 1, line 35 - line 59 see column 6, line 46 - column 7, line 4 see column 7, line 29 - column 8, line 24 see claim 1 see figures 2,3</p> <p style="text-align: center;">-----</p>	<p>8,17</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No  
PCT/US 97/05105

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0591770 A	13-04-94	GB 2271246 A	06-04-94
		AU 665670 B	11-01-96
		AU 4755893 A	14-04-94
		CN 1090691 A	10-08-94
		FI 934337 A	04-04-94
-----			
EP 0650268 A	26-04-95	US 5481570 A	02-01-96
		JP 7183840 A	21-07-95
-----			
US 4597105 A	24-06-86	US 4481670 A	06-11-84
		AU 550067 B	27-02-86
		AU 2205983 A	04-06-84
		AU 555331 B	18-09-86
		AU 4745685 A	02-01-86
		CA 1219638 A	24-03-87
		CA 1205140 C	27-05-86
		CA 1226626 C	08-09-87
		CA 1226625 C	08-09-87
		DE 3382799 D	15-02-96
		DE 3382799 T	25-07-96
		EP 0127641 A	12-12-84
		EP 0179283 A	30-04-86
		JP 4053132 B	25-08-92
		JP 59501850 T	01-11-84
		US 4714923 A	22-12-87
		WO 8402043 A	24-05-84
		US 4525861 A	25-06-85
		US 4545071 A	01-10-85
		US 4550443 A	29-10-85
-----			